

# Lower Clear Fork Brazos, Texas 2D Base Level Engineering and Mapping Methods and Results

Texas Water Development Board Contract No. 2101792542, Task Order 1

July 2023

## Prepared for:

Texas Water Development Board  
Attn: Manuel Razo, GISP, CFM  
1700 N. Congress Avenue  
Austin, Texas 78701

## Prepared By:

AECOM Technical Services  
13640 Briarwick Drive, Suite 200  
Austin, TX 78729  
[aecom.com](http://aecom.com)

## Document History

### DOCUMENT LOCATION

K:/FY2022/22-06-0048S

### REVISION HISTORY

| Version Number | Version Date | Summary Changes           | Team/Author |
|----------------|--------------|---------------------------|-------------|
| 1.0            | May 2023     | Deliverable to TWDB       | AECOM       |
| 2.0            | July 2023    | Final Deliverable to TWDB | AECOM       |

### APPROVALS

This document requires the approval of the following persons:

| Role            | Name        | Phone        | Title (CLIN/RMC) | Review Date  | Approved Date |
|-----------------|-------------|--------------|------------------|--------------|---------------|
| Project Manager | Sean Sutton | 512.457.7745 | Project Manager  | May 30, 2023 | June 19, 2023 |

### CLIENT DISTRIBUTION

| Name        | Title/Organization     | Location      |
|-------------|------------------------|---------------|
| Manuel Razo | Contract Manager, TWDB | Austin, Texas |

## Table of Contents

|           |                                                                      |           |
|-----------|----------------------------------------------------------------------|-----------|
| <b>1.</b> | <b>Introduction.....</b>                                             | <b>1</b>  |
| <b>2.</b> | <b>2D BLE Modeling Inputs and Controls.....</b>                      | <b>3</b>  |
| 2.1       | <i>Topographic Data.....</i>                                         | 3         |
| 2.1.1     | Inventory.....                                                       | 3         |
| 2.1.2     | Evaluation.....                                                      | 4         |
| 2.1.2.1   | Lower Clear Fork Brazos Watershed Source Terrain Data.....           | 5         |
| 2.1.3     | Data Processing .....                                                | 7         |
| 2.1.4     | DEM QA/QC.....                                                       | 7         |
| 2.2       | <i>2D BLE Methods.....</i>                                           | 8         |
| 2.2.1     | 2D Computational Mesh and Settings .....                             | 8         |
| 2.2.2     | Model and Boundary Condition Setup .....                             | 8         |
| 2.2.3     | Hydrology .....                                                      | 10        |
| 2.2.3.1   | Precipitation Frequencies .....                                      | 10        |
| 2.2.3.2   | Temporal Rainfall Distribution .....                                 | 10        |
| 2.2.3.3   | Infiltration Parameters.....                                         | 11        |
| 2.2.3.4   | USGS Gage Analysis.....                                              | 12        |
| 2.2.3.5   | Inflow Hydrograph Boundary Condition.....                            | 12        |
| 2.2.4     | Hydraulics.....                                                      | 14        |
| 2.2.4.1   | Roughness Coefficients.....                                          | 14        |
| 2.2.4.2   | Breaklines .....                                                     | 15        |
| 2.2.4.3   | Refinement Regions .....                                             | 16        |
| 2.2.5     | Quality Control.....                                                 | 17        |
| <b>3.</b> | <b>Results.....</b>                                                  | <b>17</b> |
| 3.1       | <i>Calibration .....</i>                                             | 17        |
| 3.2       | <i>Challenges.....</i>                                               | 19        |
| 3.3       | <i>Recommendations .....</i>                                         | 20        |
| <b>4.</b> | <b>Floodplain Mapping and Effective Zone A Validation.....</b>       | <b>20</b> |
| 4.1       | <i>Special Flood Hazard Area.....</i>                                | 20        |
| 4.1.1     | Model Outputs .....                                                  | 20        |
| 4.1.2     | Methodology.....                                                     | 20        |
| 4.1.3     | BLE Flood Hazard Layer.....                                          | 21        |
| 4.1.4     | Additional 1-Percent Features.....                                   | 21        |
| 4.2       | <i>Validation of Effective Zone A SFHA.....</i>                      | 21        |
| 4.2.1     | Initial Assessment A1 – Significant Topography Update Check.....     | 21        |
| 4.2.2     | Initial Assessment A2 – Check for Significant Hydrology Changes..... | 22        |
| 4.2.3     | Initial Assessment A3 – Check for Significant Development.....       | 22        |
| 4.2.4     | Validation Check A4 – Check of Studies Backed by Technical Data..... | 22        |
| 4.2.5     | Validation Check A5 – Comparison of BLE and Effective Zone A.....    | 22        |
| 4.2.6     | Validation Results .....                                             | 23        |
| 4.3       | <i>Flood Risk Analysis.....</i>                                      | 25        |
| <b>5.</b> | <b>References .....</b>                                              | <b>27</b> |
|           | <b>Appendix A BLE Map.....</b>                                       | <b>28</b> |

## List of Figures

|                                                                                                     |    |
|-----------------------------------------------------------------------------------------------------|----|
| Figure 1: Lower Clear Fork Brazos Watershed.....                                                    | 2  |
| Figure 2: Task Order 1 BLE Source Terrain Data.....                                                 | 4  |
| Figure 3: Texas Red River Brazos Basin LiDAR.....                                                   | 6  |
| Figure 4: 2014 Texas Upper Clear Fork Brazos LiDAR.....                                             | 7  |
| Figure 5: RAS 6.1 2D Computational Mesh and Boundary Conditions and USGS Peak Streamflow Gages..... | 9  |
| Figure 6: NRCS Nested Rainfall Distributions for Lower Clear Fork Brazos HUC-8 Watershed.....       | 11 |
| Figure 7: Inflow Hydrograph from Paint Watershed Model.....                                         | 13 |
| Figure 8: Inflow Hydrograph from Hubbard Watershed Model.....                                       | 13 |
| Figure 9: Inflow Hydrograph from UCFB Watershed Model.....                                          | 14 |
| Figure 10: V-notch Breakline Approach at Bridge Crossing.....                                       | 16 |
| Figure 11: Calibration Comparison at Gage Locations.....                                            | 19 |
| Figure 12: Calibration Comparison using Regression Calculations.....                                | 19 |
| Figure 13: Lower Clear Fork Brazos Watershed CNMS Validation Results.....                           | 24 |
| Figure 14: Ranking of Lower Clear Fork Brazos Watershed HUC-12s.....                                | 25 |

## List of Tables

|                                                                                          |    |
|------------------------------------------------------------------------------------------|----|
| Table 1: FEMA Vertical Accuracy Requirements for Leveraged Data.....                     | 4  |
| Table 2: LiDAR Topographic Data Available for the Lower Clear Fork Brazos Watershed..... | 5  |
| Table 3: Land Use(LU)-Soils-CN Matrix for Defining Initial Curve Number.....             | 12 |
| Table 4: USGS Peak Streamflow Gages.....                                                 | 12 |
| Table 5: NLCD 2016 Manning's n Roughness Matrix.....                                     | 15 |
| Table 6: Communities with 2D Mesh Refinement.....                                        | 17 |
| Table 7: Calibration Results.....                                                        | 18 |
| Table 8: Mapping Threshold Matrix.....                                                   | 21 |
| Table 9: Zone A Initial Assessment Results.....                                          | 22 |
| Table 10: BLE Comparison Results.....                                                    | 23 |
| Table 11: Zone A Validation Results.....                                                 | 23 |
| Table 12: Hazus 5.1 Results for 1-Percent-Annual-Chance (100 year) Scenario.....         | 26 |

# 1. Introduction

Base Level Engineering (BLE) provides technically credible flood data for various geographies - community, county, watershed and/or state level. BLE data can be shared with Federal, State, local and tribal governments, this data sharing provides stakeholders at all levels the necessary data to make informed decisions to reduce future flood losses. Without the mapping of flood prone areas, there can be a lack of information to effectively communicate flood risk to community officials, citizens, and businesses.

BLE is a riverine hydrologic and hydraulic modeling approach that builds on lessons learned to produce a baseline understanding of flood risk to communities, produced to support the assessment and maintenance of the national flood hazard inventory. Engineering models are created during a BLE assessment, producing information that meets the mapping Standards for Flood Risk Projects (FEMA Policy Memo FP 204-078-1) to produce Zone A (1-percent-annual-chance flood) information. BLE data is intended to represent the base level of investment needed for all flood study efforts FEMA will undertake. The Lower Clear Fork Brazos watershed BLE documented here was designed to use two-dimensional (2D) modeling techniques with enhancements and calibration to develop products that can be communicated and shared with stakeholders, and transitioned into FEMA regulatory data development workflows.

The intent of BLE is to provide communities technically credible flood hazard information in a cost efficient and timely manner. Additionally, BLE provides communities a chance to review draft modeling information, reflecting the potential changes in risk within their community. Providing additional flood risk datasets, like water surface elevation (WSEL) grids and flood depth grids, delivers alternative information that reinforces the variability of flood risk within a designated floodplain and supports historic community requests for a source to determine a Base Flood Elevation in Zone A areas.

For floodplain management purposes, BLE data may be used as best available information in areas that are designated as Zone A floodplain. It may also be used to regulate development in areas where no Special Flood Hazard Area (SFHA) has been mapped before. Communities may adopt BLE data to support local regulations, which facilitates use of the data in local floodplain management activities, including in the post disaster environment where a need for updated and/or enhanced flood hazard information may be necessary.

BLE provides information to communities who are currently unmapped and provides a digital entry to communities that are currently un-modernized. BLE acts as a measuring tool to allow FEMA to assess the current Zone A inventory identified as unknown or unverified in FEMA's Coordinated Needs Management Strategy (CNMS), which FEMA is required to evaluate once every five years, as described in Title 42 of the Code of Federal Regulations, Chapter III, Section 4101(e). FEMA makes this determination of flood hazard data validity by examining flood study attributes and change characteristics, as specified in the Validation Checklist of the Coordinated Needs Management Strategy (CNMS) Technical Reference. The CNMS Validation Checklist provides a series of critical and secondary checks to determine the validity of flood hazard areas studied by detailed methods (e.g., Zone AE, AH, or AO). While the critical and secondary elements in CNMS provide a comprehensive method of evaluating the validity of Zone AE studies, a cost-effective approach for evaluating Zone A studies has been lacking. Another important goal of the BLE process is scalability of the results, meaning that the model produced during the BLE assessment may be refined to produce a more enhanced model with additional manual correction and on the ground survey. If BLE modeling exists, FEMA will recommend that it be used as the base model for any detailed studies performed in those areas.

BLE practices leverage high-resolution topography that meets or exceeds the United States Geological Survey (USGS) 3-D Elevation Program (3DEP) standards and often applies flood engineering at a large scale as opposed to targeting stream reaches within a watershed. BLE can be conducted at any scale, commonly for larger areas (Hydrologic Unit Code (HUC)-8 watershed) but may be produced at the county or local level too. It is encouraged to do BLE for wider areas in order to build on efficiencies in modeling and ensure cost efficiency. Using current technologies, multiple watersheds or watersheds with large land areas can be analyzed at a more efficient rate to produce water-surface elevations and site-specific hazard data replacing outdated flood studies shown in existing Flood Insurance Rate Maps (FIRMs). All flood prone areas within a watershed will have an engineering model calculating multiple flood recurrence intervals and defining floodplains with elevation grids using high-resolution topography.



Per standard identification SID #84 and #133, BLE will include all recurrence intervals (0.2-percent, 1-percent, 1-percent plus, 1-percent minus, 2-percent, 4-percent, and 10-percent-annual-chance floods). As such, hydrologic and hydraulic analysis should be performed to determine the expected WSELs for each of the seven recurrence intervals previously identified.

The Lower Clear Fork Brazos watershed 2D BLE project was scoped as described in the Texas Water Development Board (TWDB) Task Order 1 (Contract 2101792542). In an effort to increase and enhance the flood risk products in Texas, the study was contracted through the TWDB's Cooperative Technical Partner (CTP) program to AECOM Technical Services, Inc. This report documents the BLE process, products, and results for this watershed. Figure 1 depicts the Lower Clear Fork Brazos watershed footprint.



Figure 1: Lower Clear Fork Brazos Watershed

## 2. 2D BLE Modeling Inputs and Controls

Section 2 presents fundamental components required to execute a 2D hydraulic engineering analysis for the Lower Clear Fork Brazos watershed using Hydrologic Engineering Center's River Analysis System (HEC-RAS) version 6.1 (HEC-RAS). Inputs such as elevation data, hydrology from rain-on-grid and inflow hydrographs, and hydraulic analyses and variables are defined herein. HEC-RAS rain-on-grid utility was applied in the production of the 2D BLE products produced for this watershed.

### 2.1 Topographic Data

A high resolution Digital Elevation Model (DEM) is a fundamental component for 2D engineering analyses by providing a detailed representation of the surface for hydraulic routing through the model area. As such, DEMs were developed for the Task Order 1 project by leveraging available high resolution gridded elevation data derived from Light Detection and Ranging (LiDAR) collections throughout the States of Texas. The 1 meter DEM developed to support the 2D BLE modeling and analysis, within the Lower Clear Fork Brazos watershed, was executed using the following steps:

1. Available elevation data for the project area were inventoried and collected.
2. Leveraged elevation data were evaluated and prioritized based on source vertical accuracy, year of collection, and resolution.
3. Seamless DEMs were processed using Geographic Information Systems (GIS).
4. Quality was assured using quantitative and qualitative assessment.

Documentation regarding leveraged data including coverage, accuracy, acquisition dates, and source contact/agency are presented in the figures, tables and text within Section 2.1.2. All vertical accuracy specifications were obtained from the metadata or survey reports provided with the leverage datasets. All available metadata, survey reports, and other leverage documentation are included in the FEMA Data Capture Technical Reference compliant submittal content for the Lower Clear Fork Brazos watershed.

#### 2.1.1 Inventory

An inventory of existing topographic data was conducted for the Lower Clear Fork Brazos BLE watershed footprint. Figure 2 depicts the datasets identified and leveraged across the project area. FEMA, National Oceanic and Atmospheric Administration (NOAA), USGS, Texas Natural Resources Information System (TNRIS) and other State and Federal agencies were queried to build the inventory with the most current and available data sources.

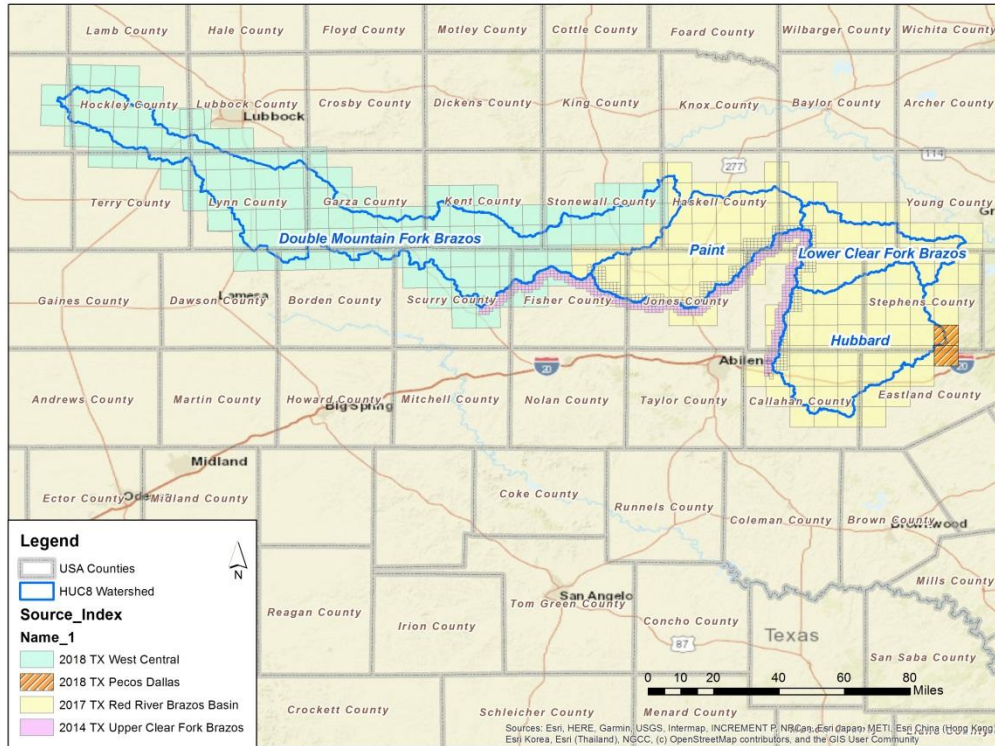


Figure 2: Task Order 1 BLE Source Terrain Data

## 2.1.2 Evaluation

A data coverage assessment was conducted to check for data gaps, extent, accuracy, and completeness. A review of related documentation, reports, indexes, and metadata associated with the leveraged datasets ensured each dataset meets FEMA accuracy requirements for topographic data. Decisions to leverage or exclude a dataset (or portion of it), were based generally on the following criteria coupled with engineering judgment:

- Data meet FEMA vertical accuracy standards (Table 1)
- Date of origination
- Data density and coverage

Table 1 depicts the Risk MAP SID #43 vertical accuracy requirements based on flood risk and terrain slope within the floodplain being mapped.

Table 1: FEMA Vertical Accuracy Requirements for Leveraged Data

| Level of Flood Risk        | Typical Slopes   | Specification Level | Vertical Accuracy* | LiDAR Nominal Pulse Spacing (NPS) |
|----------------------------|------------------|---------------------|--------------------|-----------------------------------|
| High (Deciles 1,2,3)       | Flattest         | Highest             | 24.5 cm / 36.3 cm  | ≤ 2 meters                        |
| High (Deciles 1,2,3)       | Rolling or Hilly | High                | 49.0 cm / 72.6 cm  | ≤ 2 meters                        |
| High (Deciles 2,3,4,5)     | Hilly            | Medium              | 98.0 cm / 145 cm   | ≤ 3.5 meters                      |
| Medium (Deciles 3,4,5,6,7) | Flattest         | High                | 49.0 cm / 72.6 cm  | ≤ 2 meters                        |
| Medium (Deciles 3,4,5,6,7) | Rolling          | Medium              | 98.0 cm / 145 cm   | ≤ 3.5 meters                      |
| Medium (Deciles 3,4,5,6,7) | Hilly            | Low                 | 147 cm / 218 cm    | ≤ 5 meters                        |
| Low (Deciles 7,8,9,10)     | All              | Low                 | 147 cm / 218 cm    | ≤ 5 meters                        |

\*Vertical Accuracy at 95% Confidence Level (FVA or NVA)/(CVA or VVA)



Table 2 depicts the complete list of source elevation data and attributes leveraged for the Lower Clear Fork Brazos watershed. All datasets used for hydraulic analyses and mapping meet the highest specification level defined in Table 1. The following datasets were evaluated and prioritized as best available:

**Table 2: LiDAR Topographic Data Available for the Lower Clear Fork Brazos Watershed**

| Year | Description                              | Source/Owner | Accuracy <sup>1</sup> | Approximate Footprint (mi <sup>2</sup> ) <sup>2</sup> |
|------|------------------------------------------|--------------|-----------------------|-------------------------------------------------------|
| 2017 | 2017 Texas Red River Basin LiDAR         | FEMA         | 18.8 cm               | 1,276                                                 |
| 2014 | 2014 Texas Upper Clear Fork Brazos LiDAR | FEMA         | 6.7cm                 | 18                                                    |

<sup>1</sup>RMSEz reported at the 95% confidence level

<sup>2</sup>Size of LiDAR DEM footprint utilized for BLE study

### 2.1.2.1 Lower Clear Fork Brazos Watershed Source Terrain Data

The source elevation data for the Lower Clear Fork Brazos watershed are DEMs derived from the 2017 Texas Red River Basin LiDAR; and the 2014 Texas Upper Clear Fork Brazos LiDAR. Only points classified as “ground” points (i.e., bare earth) were imported from the LiDAR and used for development of the project DEMs. Bare-earth LiDAR data are typically made by filtering non-ground returns (e.g. buildings, vegetation, etc.) from the raw laser returns. Figure 2 depicts the extent of the data defined in Table 2.

#### 2017 Texas Red River Brazos Basin LiDAR

The 2017 Texas Red River Brazos Basin Lidar project covers Callahan, Eastland, Fisher, Haskell, Jones, Shackelford, Stephens, Stonewall, Throckmorton, and Young Counties, Texas (see Figure 3). This data set covers the majority of the Paint, Lower Clear Fork Brazos, and Hubbard HUC8 Watersheds. Dewberry served as the prime contractor for the project, and Leading Edge Geomatics Ltd. completed the Lidar data acquisition and data calibration for the project area. Lidar was collected between November 17, 2016 and May 28, 2018. The 1-meter bare earth DEM data was delivered in NAD83 (2011) UTM Zone 14N horizontal datum, NAVD88 vertical datum (GEOID12B), with horizontal and vertical units in meters.

The tested Root Mean Square Error (RMSEz) of the classified Lidar data vertical accuracy for checkpoints in non-vegetated terrain equaled 9.6 cm compared with the 10 cm specification. The NVA of the classified Lidar data computed using  $RMSEz \times 1.9600$  was equal to 18.8 cm, compared with the 19.6 cm specification. The tested VVA of the classified Lidar data computed using the 95th percentile was equal to 21.6 cm, compared with the 29.4 cm specification.

The horizontal accuracy, tested using NSSDA methodology at the 95 percent confidence level was computed as 88.4 cm (target was 100 cm).

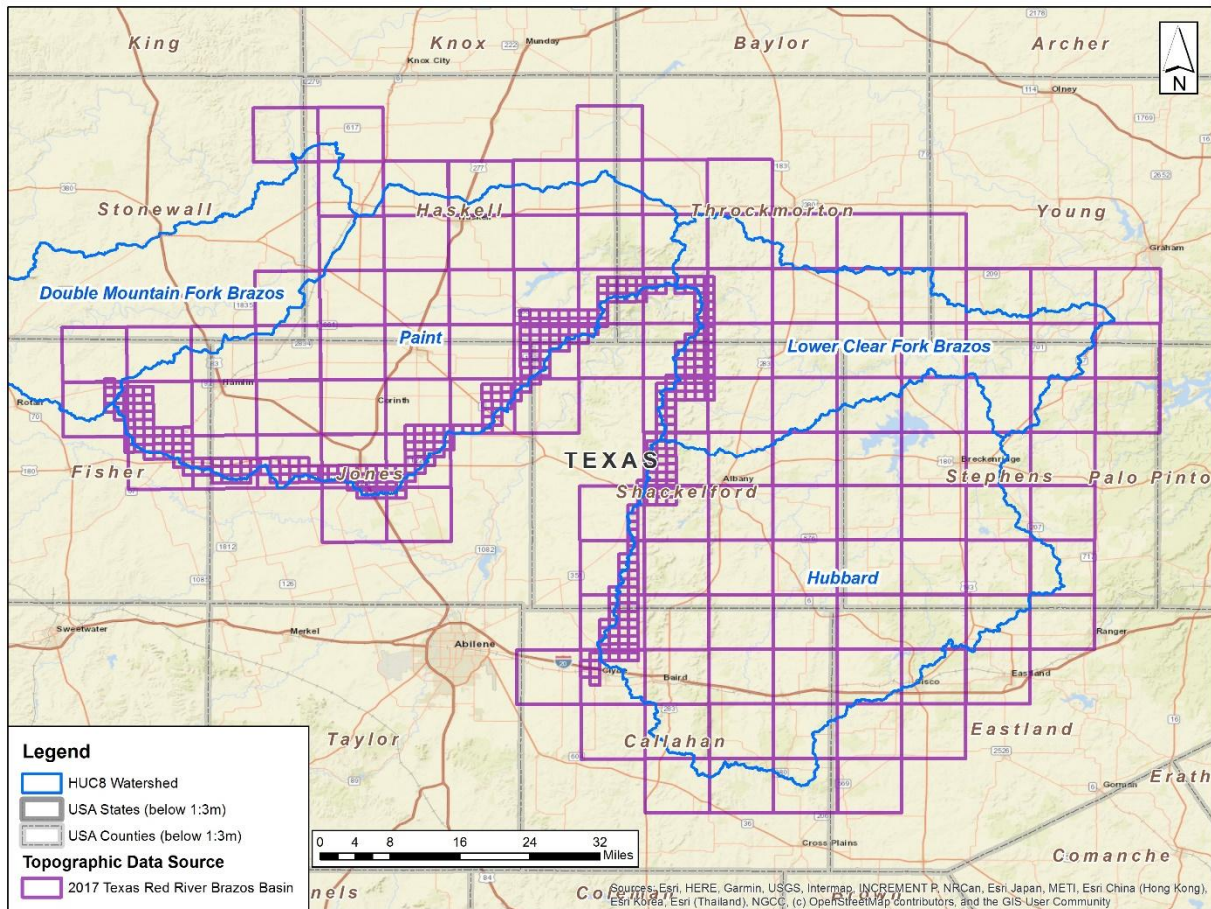


Figure 3: Texas Red River Brazos Basin LiDAR

### 2014 Texas Upper Clear Fork Brazos LiDAR

The 2014 Texas Upper Clear Fork Brazos QL2 Lidar project covers the buffer coverage along the southern border of the Double Mountain Fork Brazos and Paint HUC8 Watersheds within Fisher, Jones, and Scurry Counties, TX. The data set also covers a small area in Callahan and Shackelford Counties, TX to provide adequate buffer coverage for the Hubbard HUC8 Watershed (see Figure 4). Digital Aerial Solutions, LLC performed the Lidar data acquisition and data calibration for the project area. The data was collected December 12, 2014 through December 22, 2014. The 1-meter bare earth DEM data was delivered in NAD83 UTM Zone 14N horizontal datum, NAVD88 vertical datum, with horizontal and vertical units in meters.

The vertical accuracy tested RMSEz at the 95 percent confidence level was 3.10 cm compared to required accuracy of 9.25 cm. The NVA of the TIN tested RMSEz of 6.7 cm and 13.1 cm at the 95 percent confidence level in open terrain. The NVA of the DEM tested at an RMSEz of 6.7 cm and 13.0 cm at the 95 percent confidence level in open terrain. The tested horizontal accuracy was not provided within the Lidar project report.

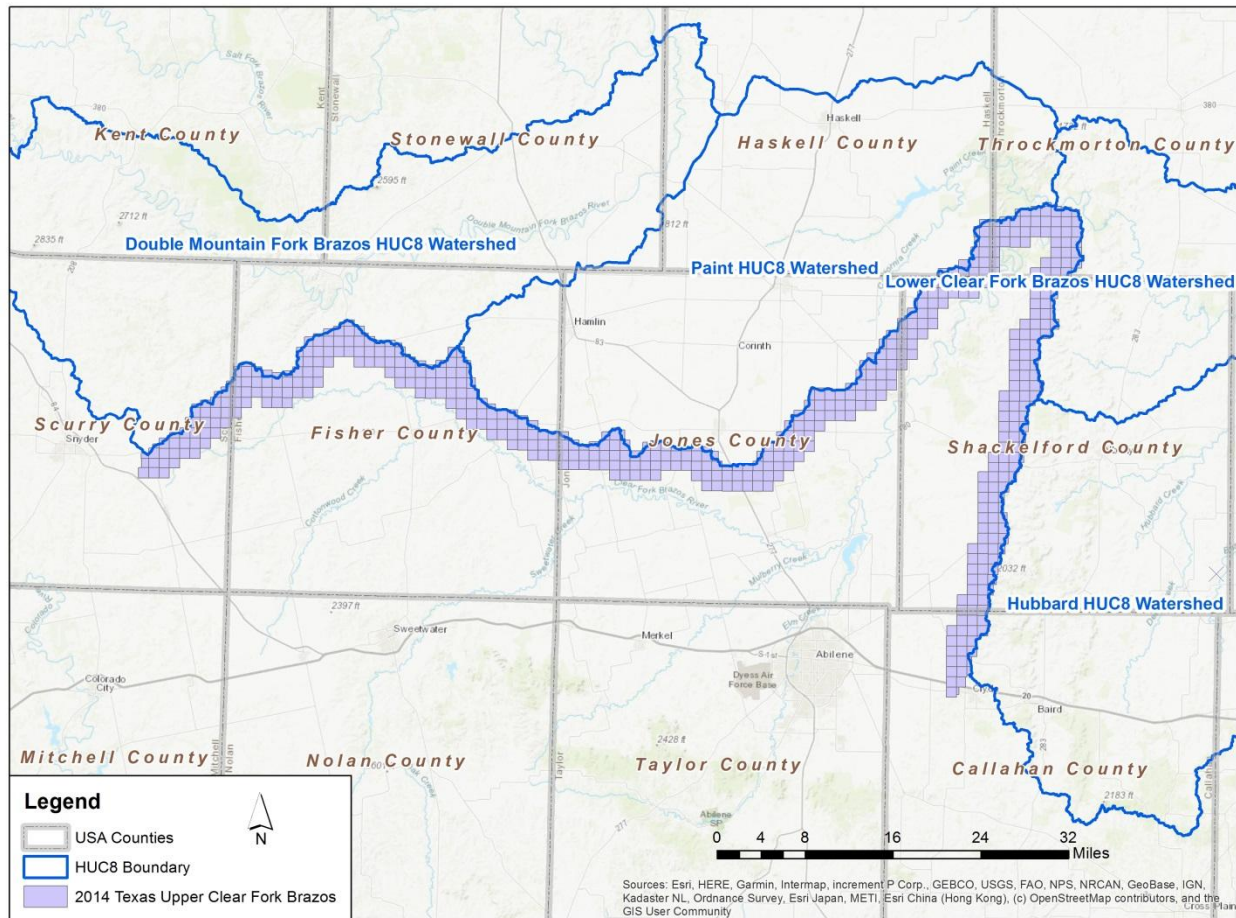


Figure 4: 2014 Texas Upper Clear Fork Brazos LiDAR

### 2.1.3 Data Processing

ArcGIS software was utilized in order to create a digital surface model for the Lower Clear Fork Brazos HUC-8 watershed project area. The LiDAR datasets were added to a mosaic dataset and prioritized by date with the most recent dataset taking the first priority. If two datasets are from the same year or flown at similar dates, the accuracy was reviewed to determine the priority. The mosaic dataset was exported to make a seamless bare earth DEM.

The exported DEM was reviewed through automated quality control (QC) to check for anomalies and outlier locations based on slope and cells that exceed z value differences from surrounding cells. Visual review was also performed to check for ground differences at the extents of the datasets for differences in ground values.

### 2.1.4 DEM QA/QC

DEMs developed for use in the Lower Clear Fork Brazos watershed BLE analysis were developed and independently assured to meet quality standards of the project. The data were developed using a controlled process, were evaluated and assured by a topographic data development team, and were evaluated and assured by the engineering team. Quality assurance (QA) during the data development process includes, but is not limited to the following QC checks:

- Horizontal Projection Check
- Vertical Datum Check
- Resolution Check
- Format Check



- Seamless Data Check to ensure the DEM files are consistent and seamless along source data edges

The QC after the development process by the DEM development team included visual observations using hillshade, contouring, color rendering, and/or other visual aids to review and identify potential impactful anomalies within the DEM surface. This QC step included, but was not limited to the following QC checks:

- Seamless Data Check to ensure no voids along the edges and between the prioritized datasets
- NoData Value Check to ensure no null values
- Manual Elevation Check using hillshade rasters to find erroneous elevation issues
- Unit Consistency Check
- Legacy Cell Value Anomalies

QA conducted after the seamless DEM development conducted by the engineering team included visual or automated assessments to identify potentially impactful anomalies or slope changes that may adversely impact hydraulic analysis.

The final DEM data developed for the Lower Clear Fork Brazos watershed is assured to meet FEMA standards and present a representative surface developed from leveraged elevation data for the purposes of this BLE project.

## 2.2 2D BLE Methods

HEC-RAS 2D hydraulic modeling and rain-on-grid utility was applied in the Texas 2D BLE products workflow. The following sections describe the engineering methods and model inputs used.

### 2.2.1 2D Computational Mesh and Settings

The Lower Clear Fork Brazos watershed (approximately 630 sqmi in size) was modeled as one single HEC-RAS geometry shown in Figure 5. The HEC-RAS boundaries were created for the Lower Clear Fork Brazos model area using ArcGIS toolsets, which reduce the need for manual edits to mesh cells within HEC-RAS that result in error generation. The Lower Clear Fork Brazos 2D mesh contains 552,998 cells consisting of 200 foot cells, with the exception of 100 foot along the 1 square mile streams and 50 foot cells within population centers using refinement regions. Within community boundaries the streamlines were also extended to the 0.5 square mile extent and assigned 50 foot cell spacing in order to be more detailed. Minor adjustments have been made to the HUC-8 boundary to improve modelling efficiency, and to allow for more effective tie in locations between upstream models. It should be noted that although the modelling footprints have been modified the mapped floodplains and other datasets will adhere to the original HUC-8 boundaries. Internal connections were used to extract flow readings for gage locations throughout the model, while profile lines were used for all other flow extractions. An adaptive 1 minute time step was used to allow the model to lower the time step, as necessary, to keep the maximum courant number under 3 for the duration of the simulation. The time step was allowed to reach 64.00 minutes for a maximum and 7.50 seconds for the minimum. A theta value of 1.0 was used. The HEC-RAS model was run with Diffusion Wave (simplified Full Momentum) equations.

### 2.2.2 Model and Boundary Condition Setup

Using HEC-RAS rain-on-grid modeling requires a 2D computational mesh boundary and often requires defining inflow boundary conditions and application precipitation values. Spatially varying precipitation DSS values were applied as a meteorological data boundary condition. The process to determine the excess precipitation values to be applied is outlined in the hydrology section. Figure 5 depicts the Lower Clear Fork Brazos model boundary, flow transition points between models, and USGS stream gages used in the study.

The Lower Clear Fork Brazos HUC-8 watershed has inflow from three different HUC-8 watersheds: Paint, Hubbard, and Upper Clear Fork Brazos (UCFB). The outflow from the models of each of these watersheds was used as an inflow hydrograph for the Lower Clear Fork Brazos model area. The hydrograph was extracted from Paint and Hubbard using a 2D connection, and then placed as a flow hydrograph external boundary condition for the Lower Clear Fork Brazos model. The inflow hydrograph from UCFB was developed using peak flows that were obtained from the FEMA effective 1D HEC-RAS model. As the drainage area of UCFB is very similar to the Paint watershed,

the hydrograph from the Paint model was used as a template for developing the hydrograph for UCFB. This hydrograph was scaled to have the peak flow of UCFB. Timing of the peak was shifted based on calibration using USGS gages within the LCFB HUC8 basin, and to find a tie-in location based on water surface elevation at cross sections within the 1D UCFB model.

Unique outflow boundaries were established for obvious riverine outflows, while the remaining boundaries were defined as continuous boundaries to allow drainage to adjacent basins to leave the model area freely. Normal depth was used for all non-unique outflow boundary conditions using approximate energy grade-line slopes estimated from the LiDAR terrain data.

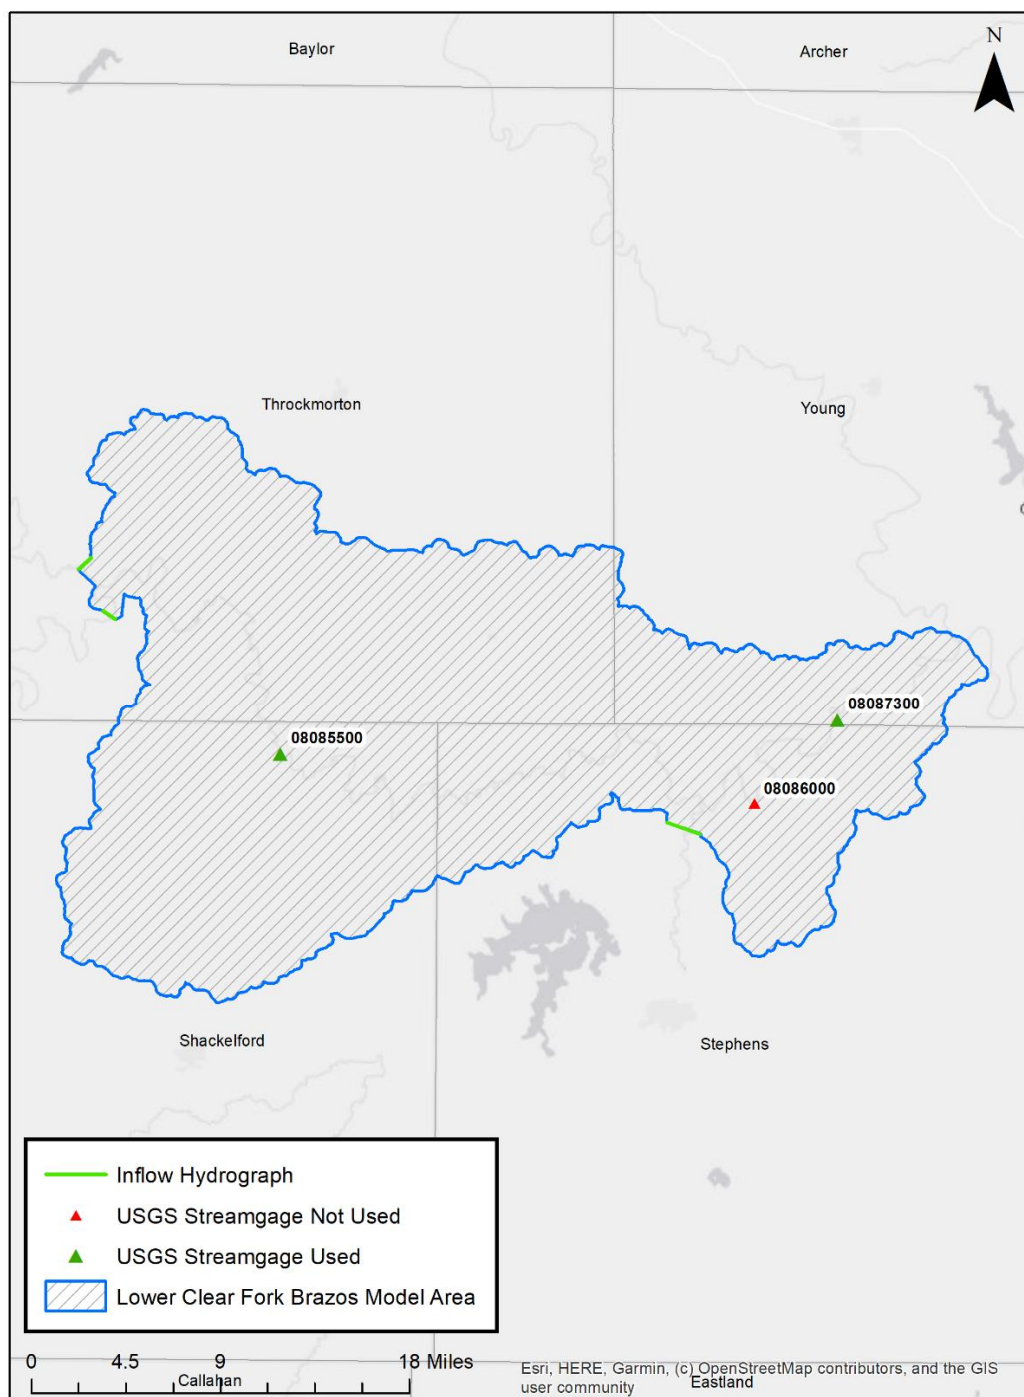


Figure 5: RAS 6.1 2D Computational Mesh and Boundary Conditions and USGS Peak Streamflow Gages



## 2.2.3 Hydrology

HEC-RAS (specifically version 6.1, used for this analysis) can implement spatial precipitation and infiltration methods. This capability has improved the efficiency and hydrologic representation of a study area. HEC-RAS cannot directly import ASCII format gridded precipitation data. Therefore, spatially varied precipitation Data Storage System (DSS) files were used for the precipitation hyetograph boundary condition in the HEC-RAS model.

### 2.2.3.1 Precipitation Frequencies

Precipitation frequency data from NOAA's Atlas 14 Precipitation Frequency Data Server (PFDS) was used for this study (NOAA, 2018). The 10-, 4-, 2-, 1-, and 0.2-percent-annual-chance precipitation depths for the 24-hr duration were determined by area-weighted intersection of the gridded PFDS data with the model area boundaries. Specifically, precipitation depths for return periods as rare as 1-in-1,000 annual chance for the state of Texas are available as raster data with 1/12-degree spatial resolution. No areal reduction factors were applied to these depths for any of the model areas since it would be inappropriate for the majority of smaller-sized tributaries within each model; however, flow and stage results throughout the model area were analyzed against historic gage and previous study data as discussed later in the Calibration and Validation section of the report.

The 1-percent-plus flood elevation is defined as the flood elevation using discharges at the upper 84% confidence limit for the 1-percent-annual-chance flood. Similarly, the 1-percent-minus flood elevation is derived using discharges at the lower 84% confidence limit for the 1-percent-annual-chance-flood. The plus and minus standard error was determined as the upper and lower 84% confidence limits (i.e., the 68-percent confidence interval) on the nominal 1-percent depth. In addition to recurrence interval precipitation estimates, 90% confidence intervals of reported Atlas 14 precipitation values are provided on the PFDS (NOAA, 2018). On a normal distribution curve, 90% confidence intervals (i.e., the upper and lower 95% confidence limits) correspond to +/- 1.645 standard deviations. The 1% plus and minus events are defined to be one standard deviation above and below the 1% event, so the provided 95% confidence limits were used to determine the 84% confidence limits using this relationship.

The 1%-plus and 1%-minus storm events were defined by utilizing a 68% confidence interval around the 1% event. The 68% confidence interval was estimated using the following equations:

$$\hat{\sigma} = \frac{X_{95} - X_{05}}{Z_{95} - Z_{05}}$$

$$CI_{68} = X_{05} - \hat{\sigma} \quad \hat{\sigma} \quad X_{95}$$


Where :

1.  $\hat{\sigma}$  represents the standard deviation of an assumed normal distribution around the NOAA Atlas 14 frequency estimates.
2.  $X_{95}$  and  $X_{05}$  represent the upper and lower estimates of the 90% confidence interval, respectively.
3.  $Z_{95}$  and  $Z_{05}$  represent the corresponding z-scores of the upper and lower estimates, respectively (i.e.,  $Z_{95} = 1.645$ ;  $Z_{05} = -1.645$ ).
4.  $CI_{68}$  the 68% confidence interval is approximated by applying one standard deviation above and below the baseline 1% storm event.

### 2.2.3.2 Temporal Rainfall Distribution

Temporal rainfall distributions were computed for the Lower Clear Fork Brazos HUC8 model area following the NRCS synthetic rainfall distribution procedure as described in the National Engineering Handbook Part 630 – Chapter 4 (NRCS, 2019). NOAA Atlas 14 data was extracted for the areas, and a unique 24-hour temporal distribution was computed for each recurrence interval (note: the 1-percent annual chance temporal distribution was used for the 1%-plus and 1%-minus frequencies). The temporal distributions are expressed in probability terms as cumulative percentages of precipitation totals at various time steps. The NOAA Atlas 14 precipitation-frequency grids only provide total depths for each frequency. Precipitation grids were spatially distributed across the 24-hour duration using a 6-minutes time series data shown in Figure 6. The resulting 6-minute interval precipitation grids were used to

develop spatially distributed precipitation DSS data for the model areas. The “Meteorological Data” tab under the Unsteady Flow Boundary Conditions editor in HEC-RAS was used to import the spatial precipitation DSS data into the 2D hydraulic model.

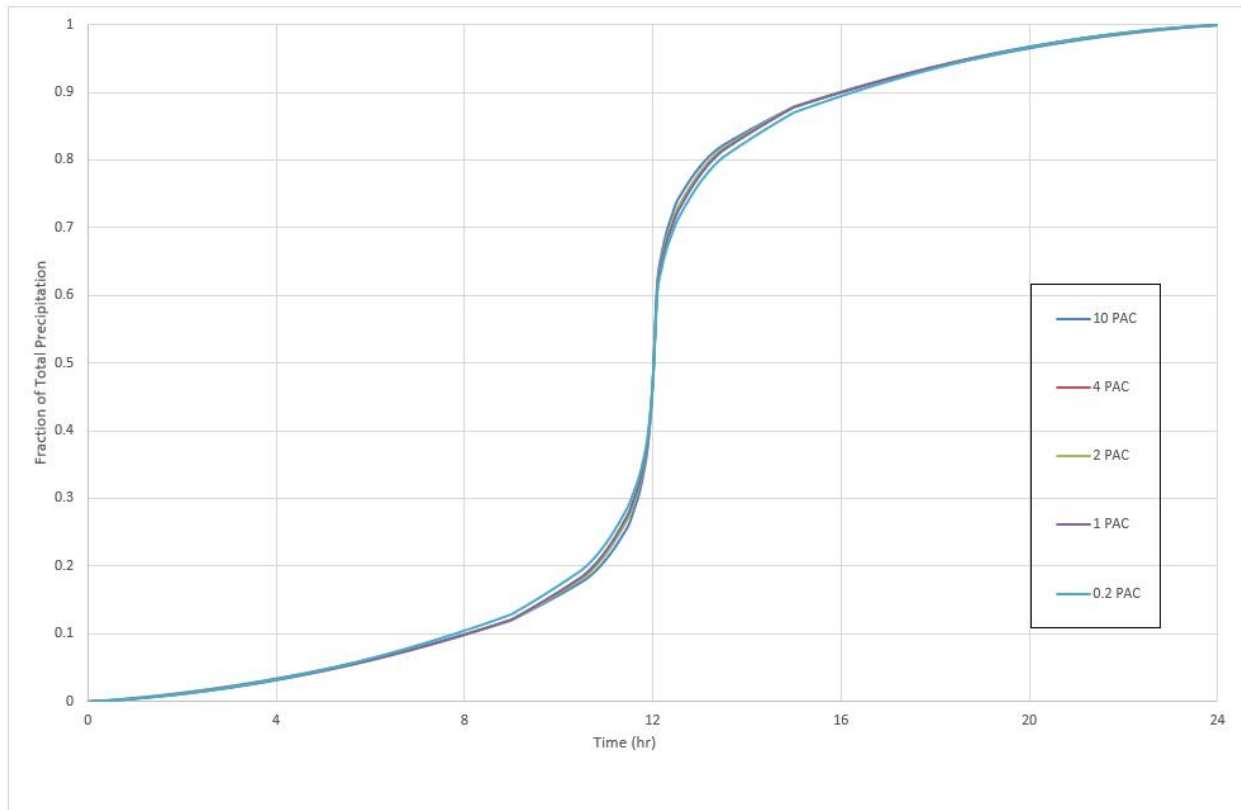

**Figure 6: NRCS Nested Rainfall Distributions for Lower Clear Fork Brazos HUC-8 Watershed**

### 2.2.3.3 Infiltration Parameters

The infiltration layer containing attributes for Soil Conservation Survey (SCS; now the Natural Resources Conservation Survey (NRCS)) curve numbers (CN), abstraction ratio, and minimum infiltration rate was initially calculated in ArcGIS using the National Land Cover Database (NLCD, 2019) and NRCS soil data. This infiltration layer was then imported to the HEC-RAS 2D hydraulic model where it is then used to estimate rainfall-runoff losses and surface runoff used in the hydraulic calculations.

A land use-soils-CN matrix can be used to determine CN for a particular study area. Table 3 details soil-water balance model lookup table for determining CN's for the intersection of soils and land use. The CN values are sourced from the NRCS's TR-55 (USDA, 1986). This matrix is intended as a general guide and then adjusted based on engineering judgment, as well as during calibrations and validation of the model, for a given study area.

**Table 3: Land Use(LU)-Soils-CN Matrix for Defining Initial Curve Number**

| LU_GridCode | NLCD LU Description          | Hydrologic Soil Group |     |     |     |
|-------------|------------------------------|-----------------------|-----|-----|-----|
|             |                              | A                     | B   | C   | D   |
| 11          | Open Water                   | 100                   | 100 | 100 | 100 |
| 12          | Perennial ice/snow           | 40                    | 40  | 40  | 40  |
| 21          | Developed Open Space         | 49                    | 69  | 79  | 84  |
| 22          | Developed Low Intensity      | 77                    | 86  | 91  | 94  |
| 23          | Developed Medium Intensity   | 89                    | 92  | 94  | 95  |
| 24          | Developed High Intensity     | 98                    | 98  | 98  | 98  |
| 31          | Barren Land                  | 77                    | 86  | 91  | 94  |
| 41          | Deciduous Forest             | 32                    | 48  | 57  | 63  |
| 42          | Evergreen Forest             | 39                    | 58  | 73  | 80  |
| 43          | Mixed Forest                 | 46                    | 60  | 68  | 74  |
| 52          | Shrub Scrub                  | 49                    | 68  | 79  | 84  |
| 71          | Herbaceous                   | 64                    | 71  | 81  | 89  |
| 81          | Hay Pasture                  | 49                    | 69  | 79  | 84  |
| 82          | Cultivated Crops             | 71                    | 80  | 87  | 90  |
| 90          | Woody Wetlands               | 88                    | 89  | 90  | 91  |
| 95          | Emergent Herbaceous Wetlands | 89                    | 90  | 91  | 92  |

### 2.2.3.4 USGS Gage Analysis

The models were compared to known USGS streamflow gage data (peak flow) to validate model results. USGS stream gages with less than 10 years of record were not considered for this study. The gages used for analysis in this study are listed in Table 4.

**Table 4: USGS Peak Streamflow Gages**

| Gage ID  | Flooding Source and Location         | Published Drainage Area (mi <sup>2</sup> ) | Period of Record |
|----------|--------------------------------------|--------------------------------------------|------------------|
| 08085500 | Clear Fk Brazos Rv at Ft Griffin, TX | 4,026                                      | 98               |
| 08087300 | Clear Fk Brazos Rv at Eliasville, TX | 5,697                                      | 56               |

### 2.2.3.5 Inflow Hydrograph Boundary Condition

Outflow from the Paint, Hubbard, and UCFB watersheds was used as inflow into the Lower Clear Fork Brazos River model. The inflow hydrograph was derived by utilizing results of the HEC-RAS models for each of these areas. By using upstream model results as inflow hydrographs to the downstream model, this allows the separate HEC-RAS models to more accurately reflect flow between watersheds. The inflow hydrographs were extracted from the Hubbard and Paint upstream models using a 2D connection. The inflow hydrograph from UCFB was developed by scaling the hydrograph from Paint to match the peak flows from the UCFB 1D HEC-RAS model. The inflow hydrograph applied to Lower Clear Fork Brazos from the Paint, Hubbard, and UCFB models, are shown in Figure 7, Figure 8, Figure 9, respectively.

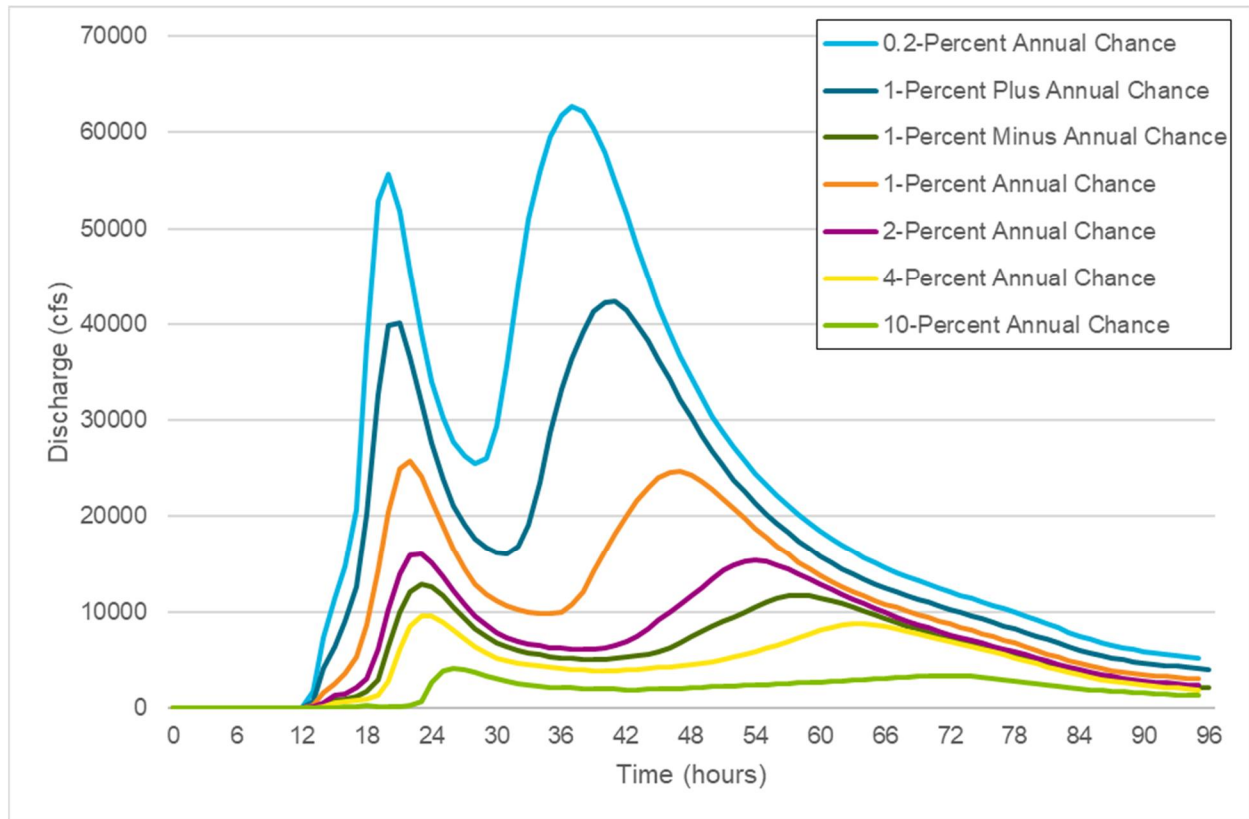


Figure 7: Inflow Hydrograph from Paint Watershed Model

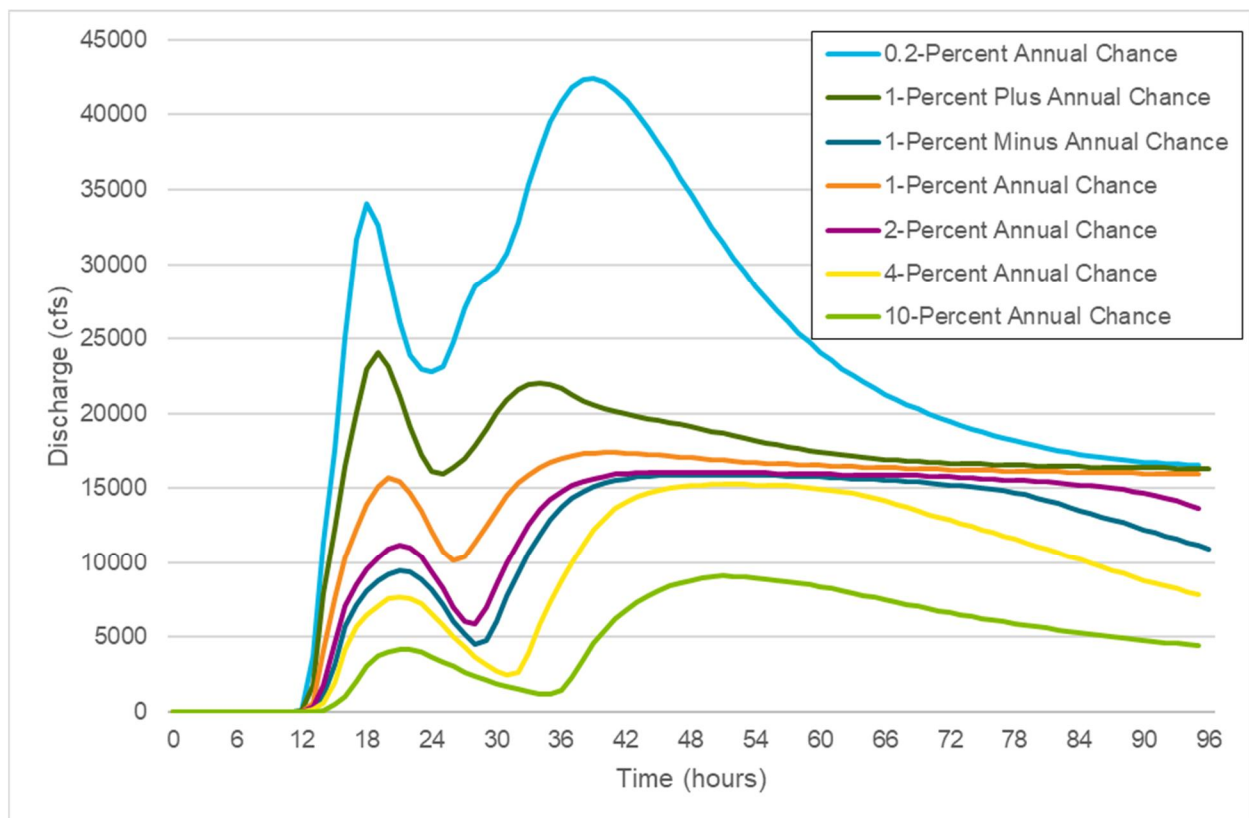


Figure 8: Inflow Hydrograph from Hubbard Watershed Model



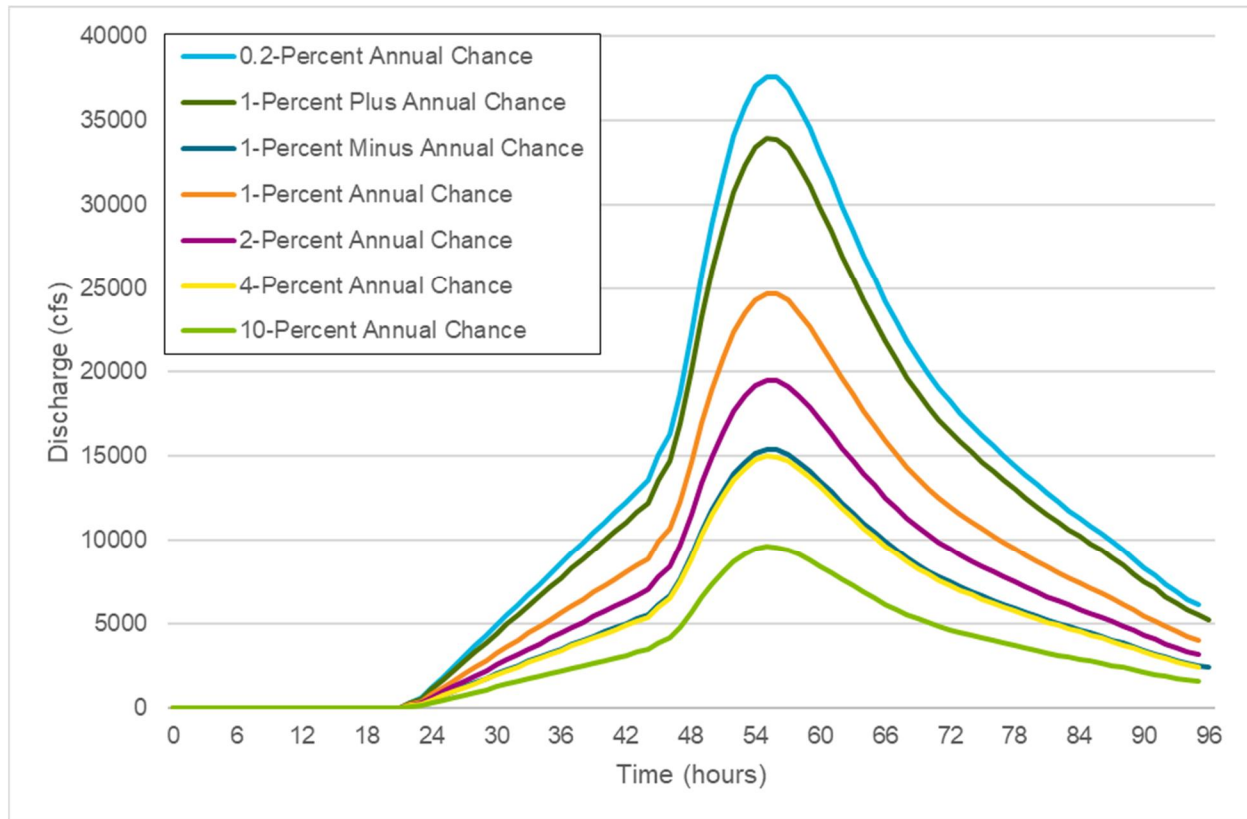


Figure 9: Inflow Hydrograph from UCFB Watershed Model

In order to achieve a seamless flood hazard result at a transition location (locations where flow is exchanged between 2D model areas), the water surface elevation (WSE) and inundation tie-ins between models must be made as close as possible. A 1,000 feet buffer was applied to each model work area for the mesh boundary. This is done so that the inflow boundary condition of the downstream model and the normal depth outlet boundary condition of the upstream model are far enough away from the work area transition location that they do not impact the WSE tie-ins between models in an undesired way. To make this overlap work without double accounting for rainfall, an internal 2D connection is placed in the upstream model at the exact same location as the inflow boundary condition for the downstream model. Approximately halfway between the model overlap is the actual model area boundaries where the mapped floodplain products switch from the upstream model results to the downstream model results. This transition location is the targeted area to have the water surface elevation and inundation tie-in as closely as possible.

## 2.2.4 Hydraulics

This section describes the remaining hydraulic modeling considerations, including implementation of Manning's roughness, breaklines, refinement regions, and hydraulic structures within the 2D computational mesh.

### 2.2.4.1 Roughness Coefficients

Manning's  $n$  roughness coverage was developed for the 2D computational mesh using typical roughness values for given NLCD land classifications. Manning's  $n$  values were used for all areas outside of the channels of the stream network, with one Manning's  $n$  value assigned to the stream channels. The channel layer was created using a 100 foot buffer. This allows for the model to accurately represent deep, swift flow within the channel and shallow overland flow outside of the channel areas. The table below shows a typical landuse-roughness matrix used in defining the roughness coverage for the study area for areas both inside and outside of the channel. Sources cited in the table were used to associate typical  $n$  values with the NLCD classifications.

**Table 5: NLCD 2016 Manning's n Roughness Matrix**

| NLCD Classification         | N Value | Source                                |
|-----------------------------|---------|---------------------------------------|
| Stream Channel              | 0.04    | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Open Water                  | 0.04    | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Developed, Open Space       | 0.04    | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Developed, Low Intensity    | 0.08    | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Developed, Medium Intensity | 0.1     | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Developed, High Intensity   | 0.15    | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Barren Land                 | 0.025   | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Deciduous Forest            | 0.16    | NRCS KS Dam Breach, 2016 , Chow, 1959 |
| Evergreen Forest            | 0.16    | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Mixed Forest                | 0.16    | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Scrub/Shrub                 | 0.1     | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Grassland/Herbaceous        | 0.035   | NRCS KS Dam Breach, 2016 , Chow, 1959 |
| Pasture/Hay                 | 0.03    | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Cultivated Crops            | 0.035   | NRCS KS Dam Breach, 2016 , Chow, 1959 |
| Woody Wetlands              | 0.12    | NRCS KS Dam Breach, 2016, Chow, 1959  |
| Emergent Herbaceous Wetland | 0.07    | NRCS KS Dam Breach, 2016, Chow, 1959  |

### 2.2.4.2 Breaklines

Breaklines align grid cell faces and were used within the 2D mesh area to define prominent features including road embankments and hydraulic structures. Road embankment features were delineated in GIS and imported into HEC-RAS as breaklines to contain water where appropriate. Similarly, significant bridge/culvert crossings that were not processed out of the terrain data were modeled by v-notch breaklines adjacent to the road embankment to align grid cells around the embankment and allow water to be routed through the embankment without creating artificial backwater. An example of the v-notch breakline approach is shown in Figure 10.

County, interstate, common name, state recognized, and U.S. roads were incorporated for road breaklines from the U.S. Census Bureau TIGER/Line road layer.

Private dams were not modeled as showing protection. This is to lessen the burden on private dam owners to maintain their dams in order to sustain the regulatory products that could be created in the future as a result of this study. The study area does not include any FEMA accredited levees.

Breaklines were also used along all the stream centerlines of streams draining greater than one square mile of drainage area, and 0.5 square miles of drainage area within densely populated areas. Each streamline was topo-derived and the stream centerline was enforced with 100 feet cell spacing in order to align cells along the stream line and capture more detail along the one square mile stream network. Streamline alignment was also hand checked with the terrain by the modeler to ensure accuracy. Stream names were referenced from other sources such as NFHL and NHD datasets. In the HEC-RAS model, streams that passed through densely populated regions were enforced as breaklines using 50ft cell spacing.

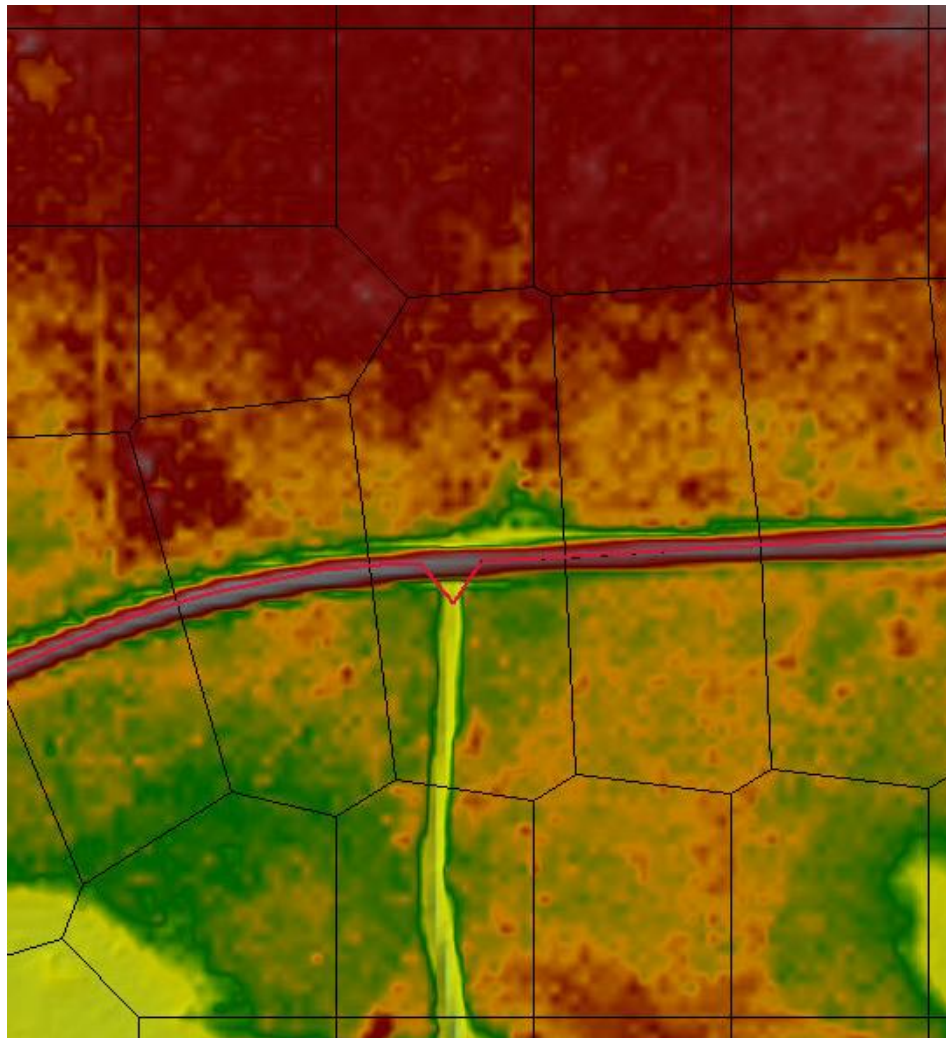


Figure 10: V-notch Breakline Approach at Bridge Crossing

### 2.2.4.3 Refinement Regions

Refinement regions were created for each community within the model. The political boundary was used to determine the shape of the refinement region. The regions were assigned a cell spacing of 50 feet by 50 feet. This finer cell spacing allows for more hydraulic calculations and mapping detail near areas where there are likely to be more structures. Table 6 shows the communities contained within the Lower Clear Fork Brazos HUC8 watershed that were modeled with refinement regions as well as the square mileage of the refinement region.

**Table 6: Communities with 2D Mesh Refinement**

| Community Name | Area (mi <sup>2</sup> ) |
|----------------|-------------------------|
| Woodson        | 0.66                    |
| South Bend     | 0.18                    |

## 2.2.5 Quality Control

The 2D BLE results were independently assured to meet quality standards of the project. Standard checklists complying with FEMA standards were used to review hydrology and hydraulics results, the resulting flood hazard area delineations and CNMS dataset. Quality assurance during the data development process includes, but is not limited to the following QC checks:

- Hydrological QC – included checks for curve number calculation, input precipitation, flood events, areal reduction factor and human error.
- Hydraulic QC – included checks for RAS geometry, breakline placement, v-notch placement to ensure water conveyance at crossings, refinement regions, roughness coefficients, boundary/initial conditions, timestep and mapping outputs
- Mapping – included checks for spot checking flood inundation accuracies based on floodplain mapping criteria described in section 4.1.2, ensuring flood extents from higher frequency events did not exceed lower frequency extents due to GIS smoothing algorithms, and topological overlap and cluster tolerance errors were resolved
- CNMS - Included review of the A1-A5 analysis for all effective approximate reaches in the HUC, geometry updates to newly studied reaches added as Zone X, and removal of scoped areas which lie outside of the final BLE footprint.

## 3. Results

The 2D BLE results for the study produced flood hazard area that compared reasonably well with effective SFHA in most cases, and provides additional estimated flood hazard risk area where not previously mapped. The HEC-RAS peak (max) results were exported for mapping and the HEC-RAS model was run with a hydrograph output interval of 1 hour, mapping output interval of 1 hour, and the detailed output interval of 1 hour. The Lower Clear Fork Brazos HCU-8 2D BLE is sufficient to facilitate FEMA regulatory processes while also providing the best available information for planning purposes.

### 3.1 Calibration

Known USGS gages within the model area with more than 10-years of flow record were used as the first priority for calibration of the 1-percent annual chance event. Discharges at gages were compared to discharges in the 2D models at the exact same locations. If a published rating curve was available, WSEs from the model were compared to the calculated 1-percent WSEs from the gage analysis. For the Lower Clear Fork Brazos model area, only known USGS gage flows were used in calibration efforts.

Two USGS gages that fall within the boundary of Lower Clear Fork Brazos watershed were utilized for calibration purposes. Regression equations were used for secondary calibration, but priority was given to the USGS gage analysis results. The regression analysis was performed as per regional regression equations using the drainage area, dimensionless main channel slope (S), OmegaEM parameter and mean annual precipitation (P) (USGS- SIR 2009-5087). Regression comparisons were made in 2 locations with varying contributing drainage area to ensure a reasonable amount of excess precipitation was being applied to the 2D mesh.

Adjustments to hydraulic features within the model were made until the flows in the model matched closely with the peak flows determined from gage and effective data. An adjustment of -13 was needed for the curve numbers to achieve reasonable calibration. Final results following model calibration at the gaged calibration locations were presented in Table 7.

**Table 7: Calibration Results**

| Calibration Location                                                                   | Source  | Method Used          | Reference         |                 |                   | HEC-RAS 6.1.0 (2D) (cfs) |
|----------------------------------------------------------------------------------------|---------|----------------------|-------------------|-----------------|-------------------|--------------------------|
|                                                                                        |         |                      | Lower Limit (cfs) | 1-percent (cfs) | Upper Limit (cfs) |                          |
| Gage 08085500                                                                          | USGS    | PeakFQ               | 41,240            | 52,140          | 71,420            | 41,812                   |
| Gage 08087300                                                                          | USGS    | PeakFQ               | 39,650            | 52,480          | 73,640            | 62,596                   |
| Rocky Creek upstream of of confluence with LCFB (Basin 1)                              | HEC-RAS | Regression Equations | 1,352             | 2,697           | 5,381             | 2,588                    |
| Tecumseh Creek upstream of FM 232 (Basin 2)                                            | HEC-RAS | Regression Equations | 777               | 1,551           | 3,095             | 2,703                    |
| Unnamed Tributary 3 to Sibley Creek upstream of confluence with Sibley Creek (Basin 3) | HEC-RAS | Regression Equations | 685               | 1,367           | 2,727             | 1,725                    |
| Foyle Creek downstream of confluence with Unnamed Tributary 5 to Foyle Creek (Basin 4) | HEC-RAS | Regression Equations | 5,332             | 10,638          | 21,226            | 18,091                   |
| Ranger Creek upstream of FM 232 (Basin 5)                                              | HEC-RAS | Regression Equations | 1,562             | 3,116           | 6,217             | 3,933                    |

Figure 11 and Figure 12 show the final results of the calibration locations, for gaged locations and regression calculation locations, compared to modeled flows throughout the Lower Clear Fork Brazos watershed, along with error bars created using the difference between 1-percent and 1-percent plus discharges and 1-percent and 1-percent minus discharge as minimum and maximum values. Seven comparisons (two gaged and five regression locations) were made with varying drainage areas to ensure the calibration of excess precipitation for different points over the entire watershed area. This large collection of calibration points provides confidence in results throughout the entire watershed.



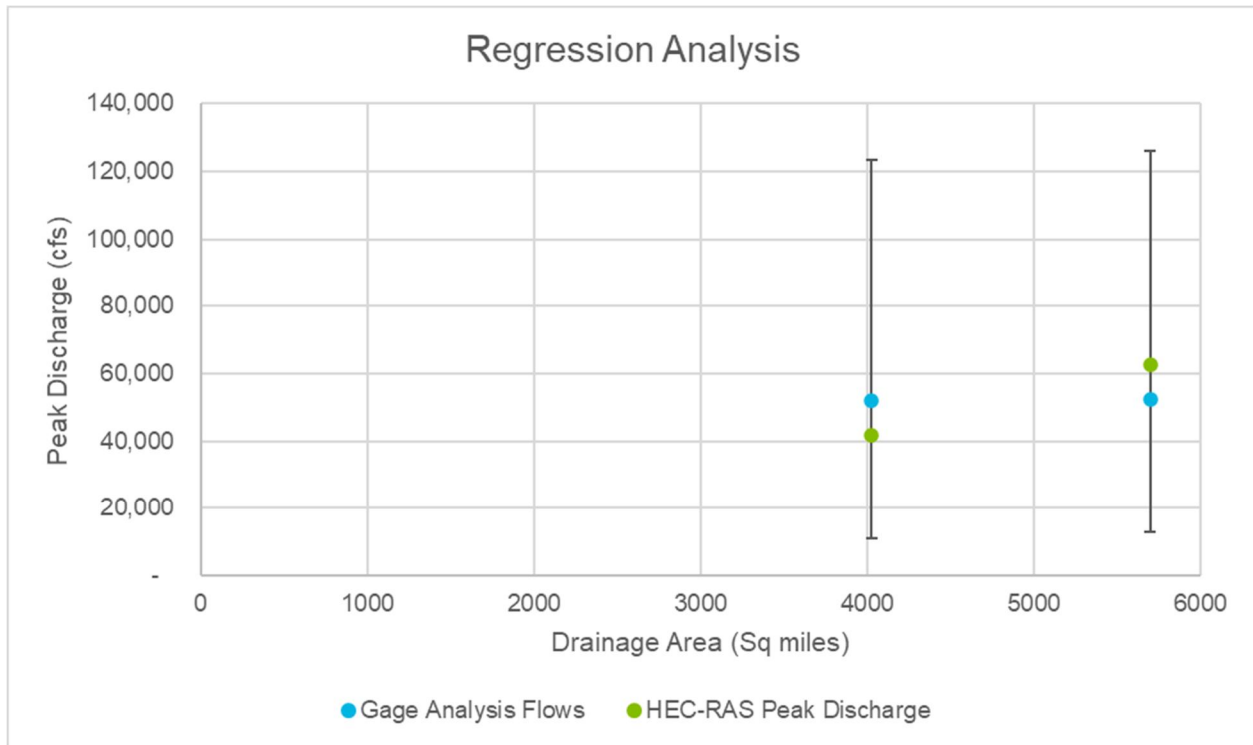


Figure 11: Calibration Comparison at Gage Locations

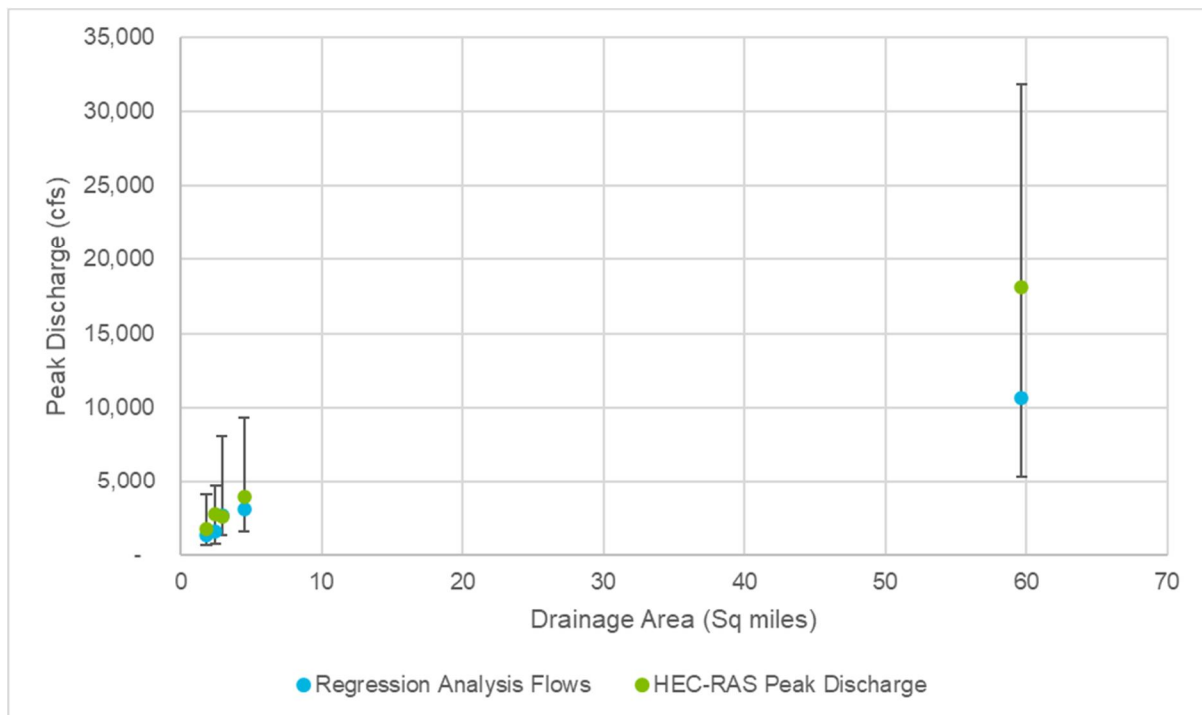


Figure 12: Calibration Comparison using Regression Calculations

### 3.2 Challenges

To allow for seamless integration of upstream watersheds, a Manning's n calibration region was added to the areas where the inflow hydrographs were applied from the Paint and UCFB models. The curve number for the entire model was also reduced by 13 for each category of land use to better calibrate to the USGS gage peak discharge data. For

the boundary condition at the boundary with the Paint model, an initial HEC-RAS model run was done using provided flows from the Paint watershed. Then, using a 2D connection in the Lower Clear Fork Brazos model, a stage-flow hydrograph was provided back to the Paint model to use as an outflow boundary condition. This iterative process allowed for any backwater conditions to be accounted for, and more seamless tie-in between the two models.

Another challenge for modeling the Lower Clear Fork Brazos HUC-8 watershed was that one of the upstream watersheds, the UCFB watershed, had been previously modeled as a 1D HEC-RAS model, and not a 2D model. The 1D model used steady flow conditions, so an outflow hydrograph had to be developed using the peak flow value from the 1D model. The Paint watershed has a similar size area to the UCFB watershed, so it was used as a basis for developing the hydrograph curve. The peak of the hydrograph was scaled to match the peak flow of the 1D model for each storm modeled. The peak was then shifted based on USGS gage calibration downstream.

Finally, mapping considerations at the downstream end of the Lower Clear Fork Brazos HUC8 watershed involved utilizing max WSE data from the recently completed Middle Brazos-Palo Pinto HUC8 2D BLE model to map upstream into the Lower Clear Fork Brazos watershed. Since the two model areas were not assumed to peak at the same time, due to large upstream drainage area and time to peak differences, the downstream boundary condition for the Lower Clear Fork Brazos model was allowed to remain normal depth at its outflow location, and then the highest flood risk between the two mapping results (from Lower Clear Fork Brazos and Middle Brazos-Palo Pinto) was mapped.

### 3.3 Recommendations

This study provides significant information useful for flood identification and communication among those affected. The study is highly scalable, and stakeholder input and further analysis would enhance the product and inform implementation of regulatory flood hazard areas. In addition, the validity of the 2D BLE results should be verified through community work map meetings before being applied as a regulatory product.

Due to the size of the HEC-RAS hydraulic model, nominal 200 foot cell sizes are utilized with refinement areas (and smaller cell sizes) implemented in specific areas of interest, as described in the modeling sections above. For detailed modeling and further improvements, smaller sized model is recommended to allow further refinement of infiltration parameters as well as use of a smaller cell sizes, along with addition of structural and survey data for each crossing.

## 4. Floodplain Mapping and Effective Zone A Validation

The following sections provide a synopsis of how raw modeled depths were translated into Special Flood Hazard Areas (SFHA). In addition to developing a new SFHA, the BLE model data was leveraged to validate the effective Zone A studies within the project footprint.

### 4.1 Special Flood Hazard Area

#### 4.1.1 Model Outputs

The HEC acknowledged RAS Mapper may not render water surface elevation values and/or delineate inundation extent appropriately for direct use in FEMA regulatory mapping products. With guidance from TWDB, AECOM created a workflow to export model water surface elevation values for each 2D mesh cell to develop regulatory-ready water surface elevation grids and subsequent flood hazard area mapping features.

#### 4.1.2 Methodology

The sloping render mode plots water surface elevation (WSE) by interpolating the WSE between the 2D cell faces, producing a more continuous flood inundation extent. Depth rasters from the sloping render mode were exported for the 10-percent, 1-percent, and 0.2-percent flood events with a tolerance of 0.001 feet. To reduce the extent of disconnected flood areas, raster grid processing is used to filter and remove disconnected, small, or shallow areas of flooding by processing through the 'Mapping Threshold Matrix' shown in Table 8.

**Table 8: Mapping Threshold Matrix**

| Area (acres) | Average Depth (feet) |
|--------------|----------------------|
| < 0.33       | -                    |
| 0.33 – 0.5   | < 0.5                |
| 0.5 – 1.0    | < 0.33               |
| 1.0 – 2.0    | <0.1                 |

Polygon outputs from the 'Mapping Threshold Matrix' also fill in minor areas of high ground (islands) that are less than 0.33 acre. The outputs are then modified through a Simplification and Smoothing process to reduce unnecessary/erroneous vertices, remove rough edges and reduce the size and complexity of the raw floodplain polygons for the 1-percent, and 0.2-percent flood events. For the Lower Clear Fork Brazos watershed, the polygon outputs were simplified by retaining critical points at a 5 foot tolerance. The simplified polygon outputs were then smoothed utilizing the PAEK algorithm and the tolerance was set to 25 feet. The 10-percent flood event polygons are not modified through the simplification and smoothing process and are delivered in the rasterized polygon shape.

Due to topographic differences within a lake footprint, these areas sometimes appear partially mapped in the flood extents from the model results. Lakes and reservoirs larger than 40 acres are reviewed to ensure full inundation on the 1-percent, and 0.2-percent polygon extents. If necessary, lake boundaries were copied into the flood event polygons to make sure they are fully mapped.

Once the final polygon flood extents are complete, it is necessary to merge the 10-percent boundaries into the 1-percent and the 1-percent extents into the 0.2-percent extents. This step ensures that the extents of the 10-percent floodplain is smaller than the 1-percent floodplain, and the 1-percent is smaller than the extents of the 0.2-percent floodplain.

### 4.1.3 BLE Flood Hazard Layer

BLE database format FLD\_HAZ\_AR feature classes were developed and attributed with Zone A and Shaded Zone X features. The BLE FLD\_HAZ\_AR feature class was tested for topological errors described in the FIRM Database Technical Reference and all errors were fixed for data integrity and BLE-schema agreement. The 10-percent boundaries have been included in the BLE TENPCT\_FP feature class.

### 4.1.4 Additional 1-Percent Features

The BLE results for this study produced a SFHA that compares favorably with the effective SFHA. These boundaries provide an estimated SFHA in areas that have not been previously studied and therefore do not currently have an SFHA mapped. These results provide context for flood risk communication as part of the Discovery process, and should be verified through community work map meetings before being applied to a regulatory product.

A map showing the BLE results is included as Appendix A BLE Map.

## 4.2 Validation of Effective Zone A SFHA

The inventory of Zone A studies (458 miles) in the Lower Clear Fork Brazos watershed were classified in CNMS with validation status of "UNVERIFIED" (398.5 miles) or "VALID" (59.5 miles), and with status type of "BEING STUDIED." The following is a summary of the results of the CNMS validation assessment for the effective Zone A studies in the study area. Initial Assessment checks A1-A3 were evaluated for the CNMS inventory of Zone A studies.

### 4.2.1 Intial Assessment A1 – Significant Topography Update Check

This check involves determining whether a topographic data source is available that is significantly better than what was used for the effective Zone A modeling and mapping. No effective Zone A studies within this watershed utilized LiDAR data and the topographic sources used in this BLE study are considered significant improvements. Therefore, all reaches fail this check.

## 4.2.2 Initial Assessment A2 – Check for Significant Hydrology Changes

This check involves first determining if regression equations were used for the effective study. Next, it must be determined whether new regression equations have become available from the USGS since the date of the effective Zone A study. If newer regression equations exist for the area of interest, then an engineer must determine whether these regression equations would significantly affect the 1-percent annual chance flow.

No effective Zone A studies in this watershed are known to have used regression equations and, therefore, automatically pass this check.

## 4.2.3 Initial Assessment A3 – Check for Significant Development

This check involves using the National Urban Change Indicator (NUCI) dataset to assess increased urbanization in the watershed of the Zone A study. If the percentage of urban area within the HUC-12 watershed containing the effective Zone A study is 15% or more, and has increased by 50% or more since the effective analysis, the study would fail this check. Although the NUCI data provide year-to-year changes in urbanization, the NLCD also is needed to establish a baseline of urban land cover for this analysis. The check for significant development in this watershed was completed by evaluating percentage of urban change at the HUC-12 level.

All effective Zone A studies within the watershed are classified as rural and, therefore, pass this check.

All of the initial assessment results are shown in Table 9.

**Table 9: Zone A Initial Assessment Results**

| Assessment Check | Pass / Fail | Notes                                                                     |
|------------------|-------------|---------------------------------------------------------------------------|
| A1 – Topography  | Fail        | LiDAR data was not used in effective studies, but LiDAR is now available. |
| A2 – Hydrology   | Pass        | Regression equations not known to be used for effective study.            |
| A3 – Development | Pass        | Watershed does not meet urban threshold.                                  |

## 4.2.4 Validation Check A4 – Check of Studies Backed by Technical Data

Zone A studies that pass all initial assessment checks described above may be categorized as “VALID” in the CNMS Inventory only if the effective Zone A study is supported by modeling or sound engineering judgment and all regulatory products are in agreement. If the effective Zone A study passes all initial assessment checks, but is not supported by modeling, or if the original engineering method used is unsupported or undocumented, a comparison of the BLE results and effective Zone A's is performed.

All effective Zone A studies in the watershed are not model-backed and, therefore, fail this check.

## 4.2.5 Validation Check A5 – Comparison of BLE and Effective Zone A

The BLE/effective Zone A comparison method leverages the existing Floodplain Boundary Standard (FBS) certification procedures described in FEMA SID 113, but with a slight modification. This modified FBS comparison approach uses the 1-percent plus and 1-percent minus flood profiles and horizontal and vertical tolerances described in FEMA's Automated Engineering guidance document dated May 2016. For the comparison of BLE and effective Zone A in the Texas study area, the following vertical and horizontal tolerances were used to conduct the modified FBS procedure. One point was placed every 200 feet along the floodplain boundaries for comparison.

- Vertical Tolerance: +/- 2.5 - 5 feet (one-half contour interval of effective topographic source).
- Horizontal Tolerance: +/- 75 feet (standard horizontal tolerance for BLE comparison testing).

Comparison results for these streams were grouped at the HUC-12 level and are summarized in Table 10 to better understand the general health of the HUC-12 watershed, but the validation check was performed at the stream level. Streams where the percentage of passing FBS sample points is greater than or equal to 85% are marked as "Pass", otherwise marked as "Fail".

**Table 10: BLE Comparison Results**

| HUC-12 Watershed                          |                  | Total FBS points | Fail  | Pass   | %Pass | BLE Comparison Pass? (>85%) | Priority Score |
|-------------------------------------------|------------------|------------------|-------|--------|-------|-----------------------------|----------------|
| Watershed Name                            | Watershed Number |                  |       |        |       |                             |                |
| Lower Clear Fork Brazos Watershed         | All Streams      | 20,328           | 5,634 | 14,694 | 72%   | Fail                        |                |
| 120601040104-Mill Creek                   | 120601040104     | 469              | 78    | 391    | 83%   | Fail                        | 8.3            |
| Brushy Branch-Clear Fork Brazos River     | 120601040202     | 1,314            | 438   | 876    | 67%   | Fail                        | 17.5           |
| Bufford Creek                             | 120601040301     | 1,337            | 345   | 992    | 74%   | Fail                        | 20.6           |
| Collins Creek-Clear Fork Brazos River     | 120601040105     | 887              | 221   | 666    | 75%   | Fail                        | 16.2           |
| Gage Creek-Clear Fork Brazos River        | 120601040302     | 2,778            | 862   | 1,916  | 69%   | Fail                        | 27.0           |
| Givens Creek                              | 120601040201     | 1,631            | 491   | 1,140  | 70%   | Fail                        | 23.1           |
| Huffstuttle Creek-Clear Fork Brazos River | 120601040205     | 1,820            | 570   | 1,250  | 69%   | Fail                        | 29.0           |
| Lambshhead Creek-Clear Fork Brazos River  | 120601040103     | 958              | 217   | 741    | 77%   | Fail                        | 18.1           |
| Lower Kings Creek                         | 120601040204     | 1,249            | 342   | 907    | 73%   | Fail                        | 21.5           |
| Murphy Creek-Foyle Creek                  | 120601040107     | 840              | 249   | 591    | 70%   | Fail                        | 14.8           |
| Peveler Creek-Clear Fork Brazos River     | 120601040303     | 1,361            | 338   | 1,023  | 75%   | Fail                        | 15.6           |
| Ranger Creek-Clear Fork Brazos River      | 120601040102     | 1,346            | 379   | 967    | 72%   | Fail                        | 22.5           |
| Shirley Branch-Clear Fork Brazos River    | 120601040108     | 874              | 254   | 620    | 71%   | Fail                        | 14.6           |
| Taylor Creek-Foyle Creek                  | 120601040106     | 595              | 85    | 510    | 86%   | Pass                        | 7.1            |
| Tecumseh Creek                            | 120601040101     | 1,236            | 302   | 934    | 76%   | Fail                        | 19.5           |
| Upper Kings Creek                         | 120601040203     | 1,633            | 463   | 1,170  | 72%   | Fail                        | 22.7           |


#### 4.2.6 Validation Results

Based on the validation assessments and BLE comparison results described above, the CNMS inventory of Zone A studies in the Navidad watershed has been updated as summarized in Table 11 and illustrated in Figure 13.

**Table 11: Zone A Validation Results**

| Validation Status | Status Type   | Total Miles |
|-------------------|---------------|-------------|
| VALID             | BEING STUDIED | 59.5        |
| UNVERIFIED        | BEING STUDIED | 398.5       |



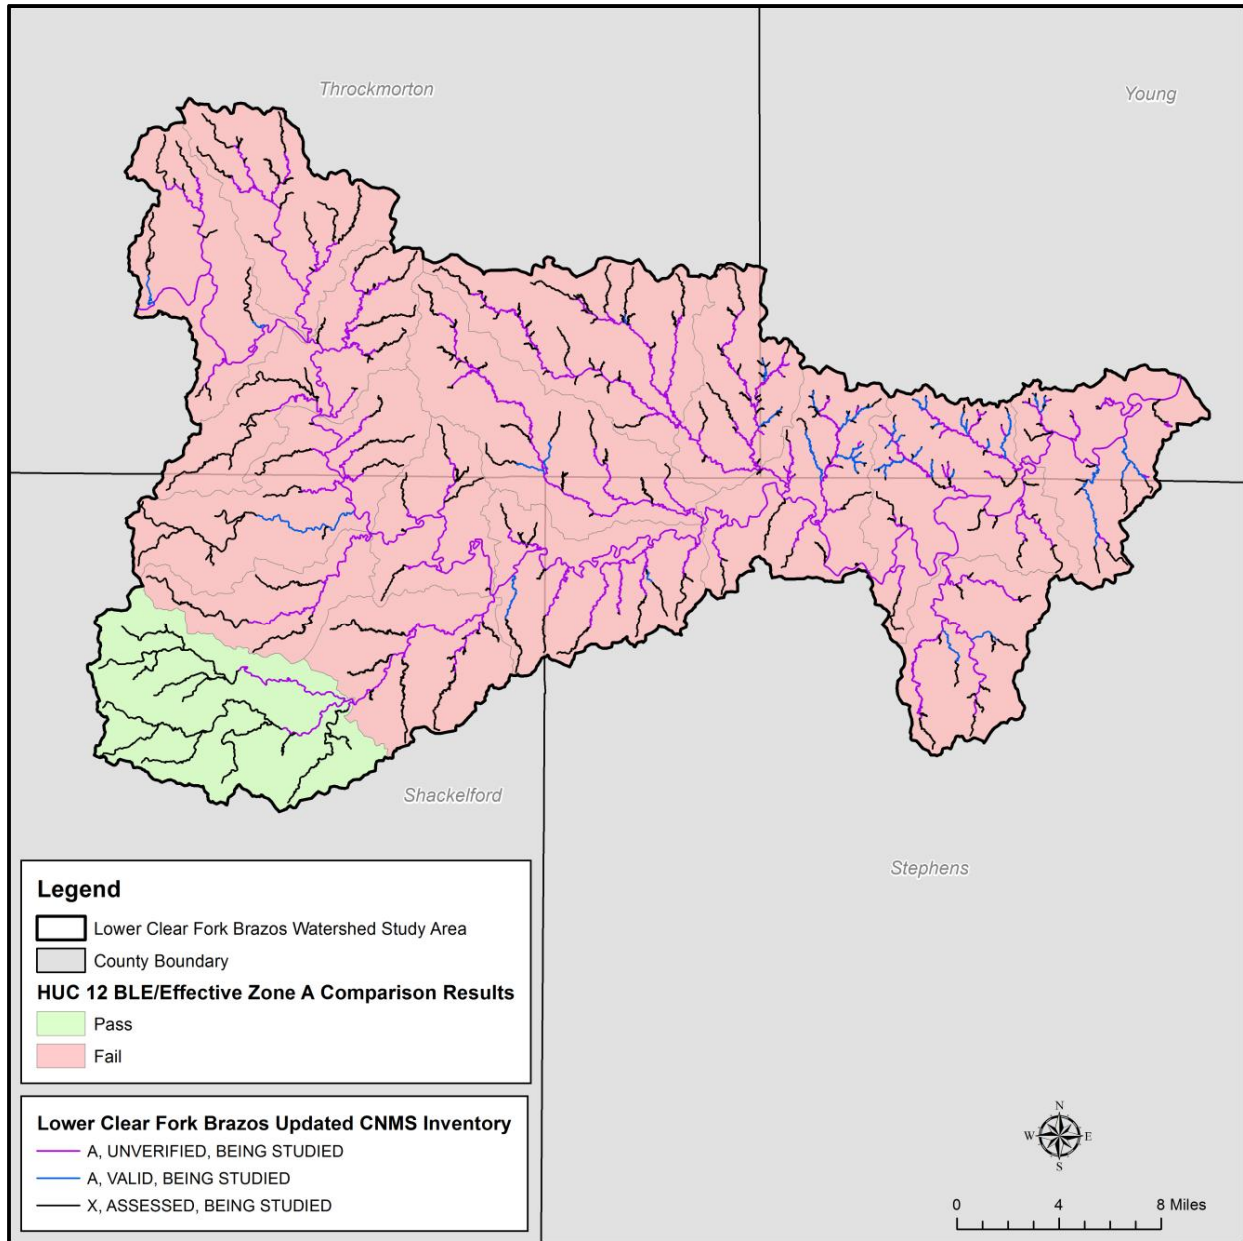

**Figure 13: Lower Clear Fork Brazos Watershed CNMS Validation Results**

An overall risk for each HUC-12 watershed was calculated using the National Flood Risk Percentages Dataset and its proportional area. The weighted risk was multiplied by the percentage of points in the watershed that failed the CNMS comparison to effective to determine the priority score. Figure 14 below shows the range of the HUC-12 priority scores which can be used to initiate discussions during the Discovery phase.

Huffstutle Creek-Clear Fork Brazos River HUC-12 was determined to have the highest priority score and the most need while Taylor Creek-Foyle Creek HUC-12 had the lowest score.

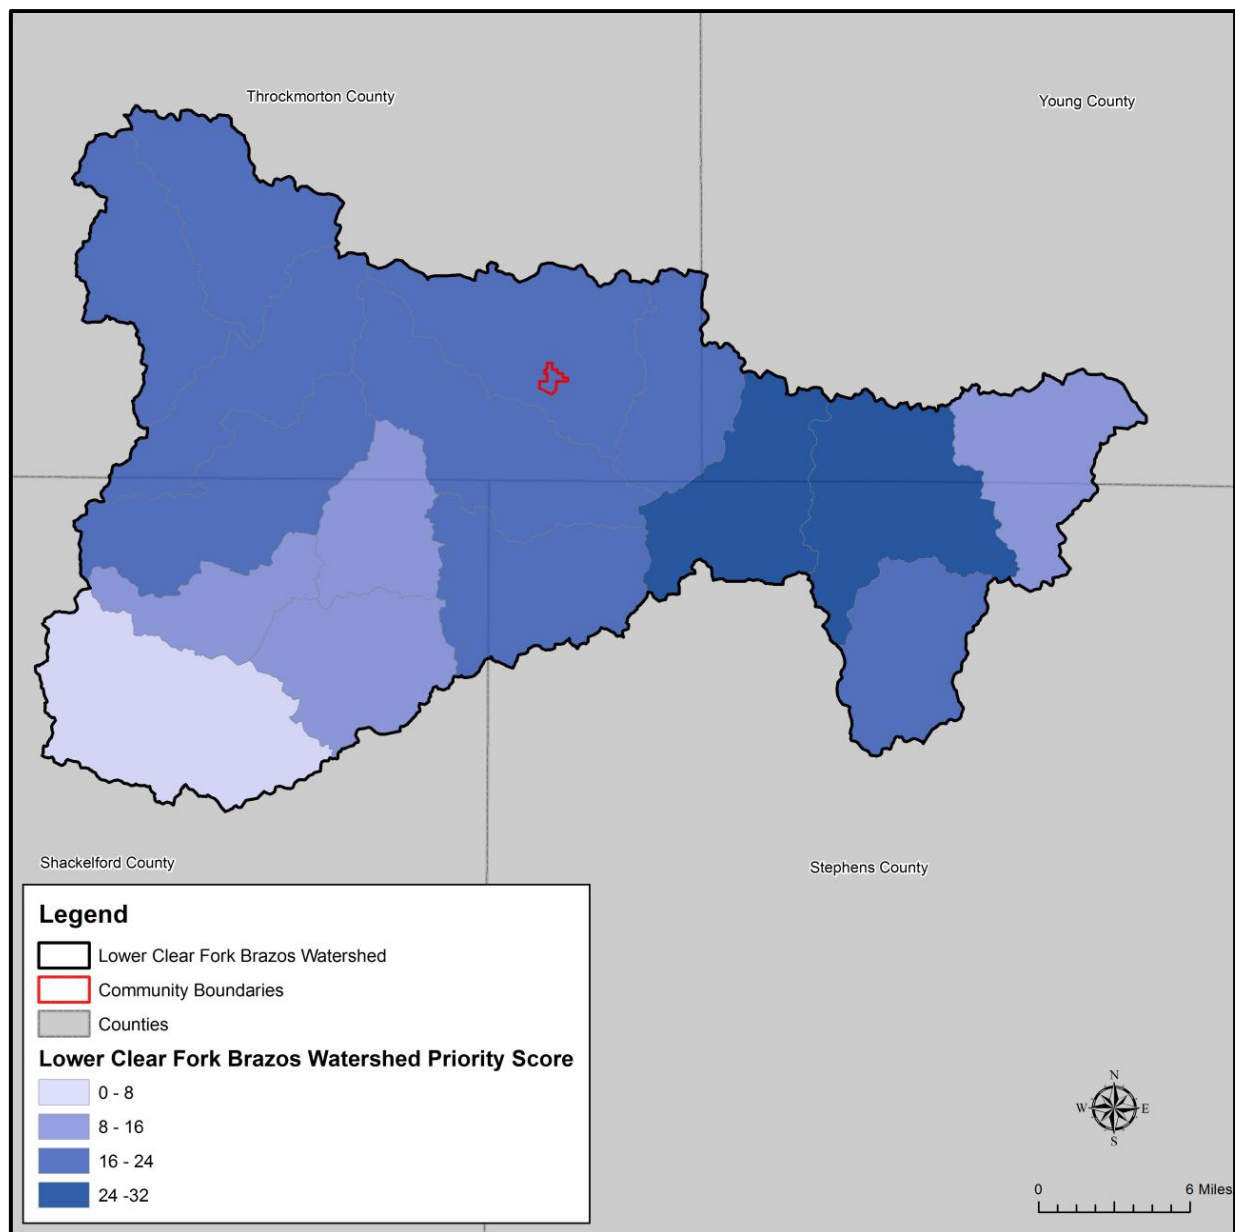


Figure 14: Ranking of Lower Clear Fork Brazos Watershed HUC-12s

### 4.3 Flood Risk Analysis

A flood risk analysis was performed for this project. The updated 1-percent annual chance depth grid was used to calculate the potential flood losses. The loss results are stored in the S\_FRAC\_AR spatial file within the FRD geodatabase. All results are reported in whole dollar values.

Hazus version 5.1 was used for the basic and refined loss analysis.

The losses are reported via census blocks. It is important to note that Hazus version 5.1 uses dasymetric census blocks. Dasymetric mapping removes undeveloped areas (such as areas covered by other bodies of water, wetlands, or forests) from the census blocks, changing their shape and reducing their size in these areas. For more information on dasymetric data visit FEMA's [Media Library](#) for the [Hazus-MH Data Inventories: Dasymetric vs. Homogenous](#), or [Hazus 3.0 Dasymetric Data Overview](#).

Hazus analysis was performed by county within the project watershed extents for each return period to ensure proper model processing. A summary of results for these counties for the 1-percent a.c.e. scenarios are shown in Table 12. Totals only reflect data for those census tracts/blocks included in the user's study region and will reflect the entire county only if all of the census blocks for that county/state were selected at the time of study region creation.

**Table 12: Hazus 5.1 Results for 1-Percent-Annual-Chance (100 year) Scenario**

| County       | Full Replacement –<br>Total Loss | Dollar Exposure<br>(Replacement Value) -<br>Buildings | Dollar Exposure<br>(Replacement Value) -<br>Contents |
|--------------|----------------------------------|-------------------------------------------------------|------------------------------------------------------|
| Shackelford  | \$656,000                        | \$17,040,000                                          | \$13,799,000                                         |
| Stephens     | \$1,519,000                      | \$38,719,000                                          | \$27,218,000                                         |
| Throckmorton | \$3,848,000                      | \$61,356,000                                          | \$36,841,000                                         |
| Young        | \$5,334,000                      | \$47,742,000                                          | \$26,016,000                                         |
| Total        | \$11,357,000                     | \$164,857,000                                         | \$103,874,000                                        |

## 5. References

Dewitz, J., and U.S. Geological Survey, 2021, *National Land Cover Database (NLCD) 2019 Products (ver. 2.0, June 2021)*: U.S. Geological Survey data release, doi:10.5066/P9KZCM54

FEMA, Shackleford County Flood Insurance Study, Texas, July 18, 1986

FEMA, Stephens County Flood Insurance Study, April 5, 2019

Harris County Flood Control District – TX, *Two Dimensional Modeling Guidelines*, July 2018

National Oceanic and Atmospheric Administration. NOAA Atlas 14, Volume 11 Version 2.0 Texas, *Precipitation-Frequency Atlas of the United States*. Silver Spring, Maryland, 2018.

Painter, C.C., Heimann, D.C., and Lanning-Rush, J.L., 2017, *Methods for estimating annual exceedance-probability streamflows for streams in Kansas based on data through water year 2015 (ver. 1.1, September 2017)*: U.S. Geological Survey Scientific Investigations Report 2017–5063, 20 p., <https://doi.org/10.3133/sir20175063>.

USACE, *HEC-RAS 2D Modeling User's Manual*, September 2021

USACE, *HEC-RAS Hydraulic Reference Manual*, September 2021

United States Department of Agriculture (USDA), *Chapter 4 of the NRCS National Engineering Handbook Part 630*. Amended August 2019.

USDA, *Chapter 5 of the NRCS National Engineering Handbook Part 630*. Amended March 2020.

USDA, NRCS, *Manning's n Values for Various Land Covers To Use for Dam Breach Analysis by NRCS in Kansas*, 2016

USDA, NRCS, *NOAA Atlas 14 rainfall for Midwest and Southeast states*, 2015.

USDA, NRCS, *Part 630 National Engineering Handbook, Chapter 5 Streamflow Data*, March 2020

USDA, Natural Resources Conservation Service (USDA, 1986), *Urban Hydrology for Small Watersheds, Technical Release 55 (TR-55)*, June 1986

USGS Scientific Investigations Report 2009-5087, *Regression Equations for Estimation of Annual Peak-Streamflow Frequency for Undeveloped Watersheds in Texas Using an L-moment Based, PRESS-Minimized, Residual-Adjusted Approach*, June 2009

## Appendix A BLE Map

